

HIGH-VOLTAGE MIXED-SIGNAL IC

UC1705

65x132 STN Controller-Driver

MP Specifications
Datasheet Revision: 1.11

IC Version: x_A
October 1, 2012

ULTRACHIP

The Coolest LCD Driver, Ever!

Table of Content

INTRODUCTION.....	3
MAIN APPLICATIONS	3
FEATURE HIGHLIGHTS	3
ORDERING INFORMATION.....	4
BLOCK DIAGRAM	5
PIN DESCRIPTION.....	6
RECOMMENDED COG LAYOUT	8
CONTROL REGISTERS	9
COMMAND TABLE	11
COMMAND DESCRIPTION	12
LCD VOLTAGE SETTING.....	17
V _{LCD} QUICK REFERENCE	18
LCD DISPLAY CONTROLS	20
ITO LAYOUT AND LC SELECTION.....	21
HOST INTERFACE	24
DISPLAY DATA RAM (DDRAM).....	29
RESET & POWER MANAGEMENT	31
ESD CONSIDERATION	35
ABSOLUTE MAXIMUM RATINGS.....	36
SPECIFICATIONS	37
AC CHARACTERISTICS	38
PHYSICAL DIMENSIONS	42
ALIGNMENT MARK INFORMATION	43
PAD COORDINATES.....	44
TRAY INFORMATION	50
REVISION HISTORY.....	51

UC1705

*Single-Chip, Ultra-Low Power
65COM by 132SEG
Passive Matrix LCD Controller-Driver*

INTRODUCTION

UC1705x is an advanced high-voltage mixed-signal CMOS IC, especially designed for the display needs of ultra-low power hand-held devices.

This chip employs UltraChip's unique DCC (Direct Capacitor Coupling) driver architecture to achieve near crosstalk free images.

In addition to low power column and row drivers, the IC contains all necessary circuits for high-V LCD power supply, bias voltage generation, timing generation and graphics data memory.

Advanced circuit design techniques are employed to minimize external component counts and reduce connector size while achieving extremely low power consumption.

MAIN APPLICATIONS

- Cellular Phones, Smart Phones, PDA, and other battery operated palm top devices or portable Instruments

FEATURE HIGHLIGHTS

- Single chip controller-driver support 65x132 graphics STN LCD panels.

- Support both row ordered and column ordered display buffer RAM access.
- Support industry standard 8-bit parallel bus (8080 or 6800 mode) and 4-wire serial bus (S8) interface.
- Ultra-low power consumption under all display patterns.
- Selectable Mux Rate and Bias Ratio allow flexible power management options.
- 7-x internal charge pump with on-chip pumping capacitor requires only 3 external capacitors to operate.
- Very low pin count (10-pin) allows exceptional image quality in COG format on conventional ITO glass.
- Flexible data addressing/mapping schemes to support wide ranges of software models and LCD layout placements.
- | | |
|--------------------------|--------------|
| V_{DD} range (Typ.): | 1.8V ~ 3.3V |
| $V_{DD2/3}$ range(Typ.): | 2.6V ~ 3.3V |
| LCD V_{OP} range: | 3.9V ~ 11.5V |
- Available in gold bump dies
- COM/SEG bump information

Bump pitch:	27 μM
Bump gap:	12 μM
Bump surface:	2077.5 μM^2 (UC1705xGAA)
	1500 μM^2 (UC1705xGBA)

ORDERING INFORMATION

Part Number	I ² C	Description
UC1705xGAA	No	Gold Bumped Die
UC1705xGBA	No	Gold Bumped Die, Bump area 1500uM ² , Bump Height 8uM

General Notes**APPLICATION INFORMATION**

For improved readability, the specification contains many application data points. When application information is given, it is advisory and does not form part of the specification for the device.

BARE DIE DISCLAIMER

All die are tested and are guaranteed to comply with all data sheet limits up to the point of wafer sawing. There is no post waffle saw/pack testing performed on individual die. Although the latest modern processes are utilized for wafer sawing and die pick-&-place into waffle pack carriers, UltraChip has no control of third party procedures in the handling, packing or assembly of the die. Accordingly, it is the responsibility of the customer to test and qualify their application in which the die is to be used. UltraChip assumes no liability for device functionality or performance of the die or systems after handling, packing or assembly of the die.

LIFE SUPPORT APPLICATIONS

These devices are not designed for use in life support appliances, or systems where malfunction of these products can reasonably be expected to result in personal injuries. Customer using or selling these products for use in such applications do so at their own risk.

CONTENT DISCLAIMER


UltraChip believes the information contained in this document to be accurate and reliable. However, it is subject to change without notice. No responsibility is assumed by UltraChip for its use, nor for infringement of patents or other rights of third parties. No part of this publication may be reproduced, or transmitted in any form or by any means without the prior consent of UltraChip Inc. UltraChip's terms and conditions of sale apply at all times.

CONTACT DETAILS

UltraChip Inc. (Headquarter)
4F, No. 618, Reconn Road,
Neihu District, Taipei 114,
Taiwan, R. O. C.

Tel: +886 (2) 8797-8947
Fax: +886 (2) 8797-8910
Sales e-mail: sales@ultrachip.com
Web site: <http://www.ultrachip.com>

BLOCK DIAGRAM

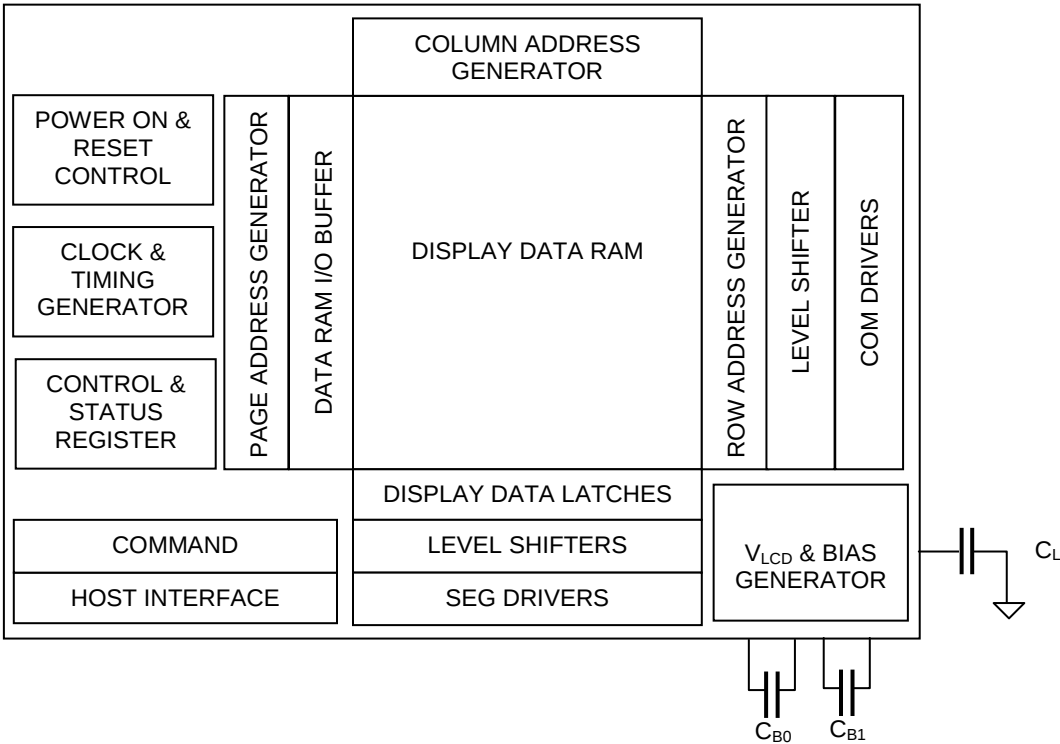


PIN DESCRIPTION

Name	Type	Pins	Description												
MAIN POWER SUPPLY															
V _{DD} V _{DD2} V _{DD3}	PWR	3 4 2	V _{DD} supplies for Display Data RAM and digital logic, V _{DD2} supplies for V _{LCD} and V _D generator, V _{DD3} supplies for V _{BIAS} and other analog circuits. V _{DD2} /V _{DD3} should be connected to the same power source. But V _{DD} can be connected to a source voltage no higher than V _{DD2} /V _{DD3} . Please maintain the following relationship: V _{DD} +1.3V ≥ V _{DD2/3} ≥ V _{DD} ITO trace resistance needs to be minimized for V _{DD2} /V _{DD3} .												
V _{SS} V _{SS2}	GND	2 4	Ground. Connect V _{SS} and V _{SS2} to the shared GND pin. In COG applications, minimize the ITO resistance for both V _{SS} and V _{SS2} .												
LCD POWER SUPPLY & VOLTAGE CONTROL															
V _{B0+} V _{B0-} V _{B1+} V _{B1-}	PWR	2 2 4 2	LCD Bias Voltages. These are the voltage sources to provide SEG driving currents. These voltages are generated internally. Connect capacitors of C _{BX} value between V _{BX+} and V _{BX-} . In COG application, the resistance of these ITO traces directly affects the SEG driving strength of the resulting LCD module. Minimize these trace resistance is critical in achieving high quality image.												
V _{LCDIN} V _{LCDOUT}	PWR	2 2	Main LCD Power Supply. When V _{LCD} is used, connect these pins together. By-pass capacitor C _L is optional. It can be connected between V _{LCD} and V _{SS} . When C _L is used, keep the ITO trace resistance around 70~100 Ω.												
NOTE Recommended capacitor values: C _B : 2.2μF/5V or 100~250x(LCD load capacitance). C _L : 330nF/25V is appropriate for most applications.															
HOST INTERFACE															
BM0 BM1	I	1 1	Bus mode: The interface bus mode is determined by BM[1:0] and {D7, D6} by the following relationship: <table><tr><td>BM[1:0]</td><td>{D7, D6}</td><td>Mode</td></tr><tr><td>11</td><td>Data</td><td>6800/8-bit</td></tr><tr><td>10</td><td>Data</td><td>8080/8-bit</td></tr><tr><td>0x</td><td>SDA, SCK</td><td>4-wire SPI w/ 8-bit token (S8: conventional)</td></tr></table>	BM[1:0]	{D7, D6}	Mode	11	Data	6800/8-bit	10	Data	8080/8-bit	0x	SDA, SCK	4-wire SPI w/ 8-bit token (S8: conventional)
BM[1:0]	{D7, D6}	Mode													
11	Data	6800/8-bit													
10	Data	8080/8-bit													
0x	SDA, SCK	4-wire SPI w/ 8-bit token (S8: conventional)													
CS0	I	1	Chip Select. Chip is selected when CS0 = “L”. When the chip is not selected, D[7:0] will be of high impedance.												
RST	I	1	It’s necessary to set pin-reset in 3 mS after V _{DD} /2/3 stable. When RST=“L”, all control registers are re-initialized by their default states. An RC Filter has been included on-chip. There is no need for external RC noise filter.												
CD	I	1	Select Control data or Display data for read/write operation. “L”: Control data “H”: Display data												
WR0 WR1	I	1 1	WR [1:0] controls the read/write operation of the host interface. See Host Interface section for details. In parallel mode, the meaning of WR[1:0] depends on which interface it is in, 6800 or 8080 mode. In serial interface modes, these two pins are not used, Connect them to V _{SS} or V _{DD} .												

Name	Type	Pins	Description																											
DT1 DT2	I	1 1	Duty selection. <table><tr><td>DT2</td><td>DT1</td><td>Duty</td></tr><tr><td>0</td><td>0</td><td>1/65</td></tr><tr><td>0</td><td>1</td><td>1/49</td></tr><tr><td>1</td><td>0</td><td>1/33</td></tr><tr><td>1</td><td>1</td><td>1/55</td></tr></table>	DT2	DT1	Duty	0	0	1/65	0	1	1/49	1	0	1/33	1	1	1/55												
			DT2	DT1	Duty																									
			0	0	1/65																									
			0	1	1/49																									
			1	0	1/33																									
1	1	1/55																												
D7~D0	I/O	8	Bi-directional bus for both serial and parallel host interfaces. In serial modes, connect D[7] to SDA, D[6] to SCK. <table><tr><td></td><td>D7</td><td>D6</td><td>D5</td><td>D4</td><td>D3</td><td>D2</td><td>D1</td><td>D0</td></tr><tr><td>BM=1x (8-bit)</td><td>DB7</td><td>DB6</td><td>DB5</td><td>DB4</td><td>DB3</td><td>DB2</td><td>DB1</td><td>DB0</td></tr><tr><td>BM=0x (S8)</td><td>SDA</td><td>SCK</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td></tr></table>		D7	D6	D5	D4	D3	D2	D1	D0	BM=1x (8-bit)	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	BM=0x (S8)	SDA	SCK	--	--	--	--	--	--
				D7	D6	D5	D4	D3	D2	D1	D0																			
			BM=1x (8-bit)	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0																			
BM=0x (S8)	SDA	SCK	--	--	--	--	--	--																						
Always connect unused pins to either V _{SS} or V _{DD} .																														
HIGH VOLTAGE LCD DRIVER OUTPUT																														
SEG1 ~ SEG132	HV	132	SEG (column) driver outputs. Support up to 132 pixels. Leave unused SEG drivers open-circuit.																											
COM1 ~ COM64	HV	64	COM (row) driver outputs. Support up to 64 rows. Leave unused COM drivers open-circuit.																											
CIC	HV	2	Icon driver outputs. Leave it open if not used.																											
Note:																														
Several control registers will specify "0 based index" for COM and SEG electrodes. In those situations, COM _x or SEG _x will correspond to index <u>x</u> -1, and the value range for those index register will be 0~63 for COM and 0~131 for SEG.																														
MISC. PINS																														
V _{DDX}		2	Auxiliary V _{DD} . This pin is connected to the main V _{DD} bus within the IC. It's provided to facilitate chip configurations in COG application. There's no need to connect V _{DDX} to main V _{DD} externally and it should <u>NOT</u> be used to provide V _{DD} power to the chip.																											
V _{SSX}		2	Auxiliary V _{SS} . These pins are connected to the main V _{SS} bus within the IC, to facilitate chip configurations in COG application. There's no need to connect V _{SSX} to main V _{SS} externally and they should <u>NOT</u> be used to provide V _{SS} power to the chip.																											
TST4	I	1	Test control. There's an on-chip pull-up resistor for TST4. Leave it open during normal use.																											
TST2	I/O	1	Test I/O pins. Leave these pins open during normal use.																											
Dummy		11	Dummy pins are NOT connected inside the IC.																											

RECOMMENDED COG LAYOUT

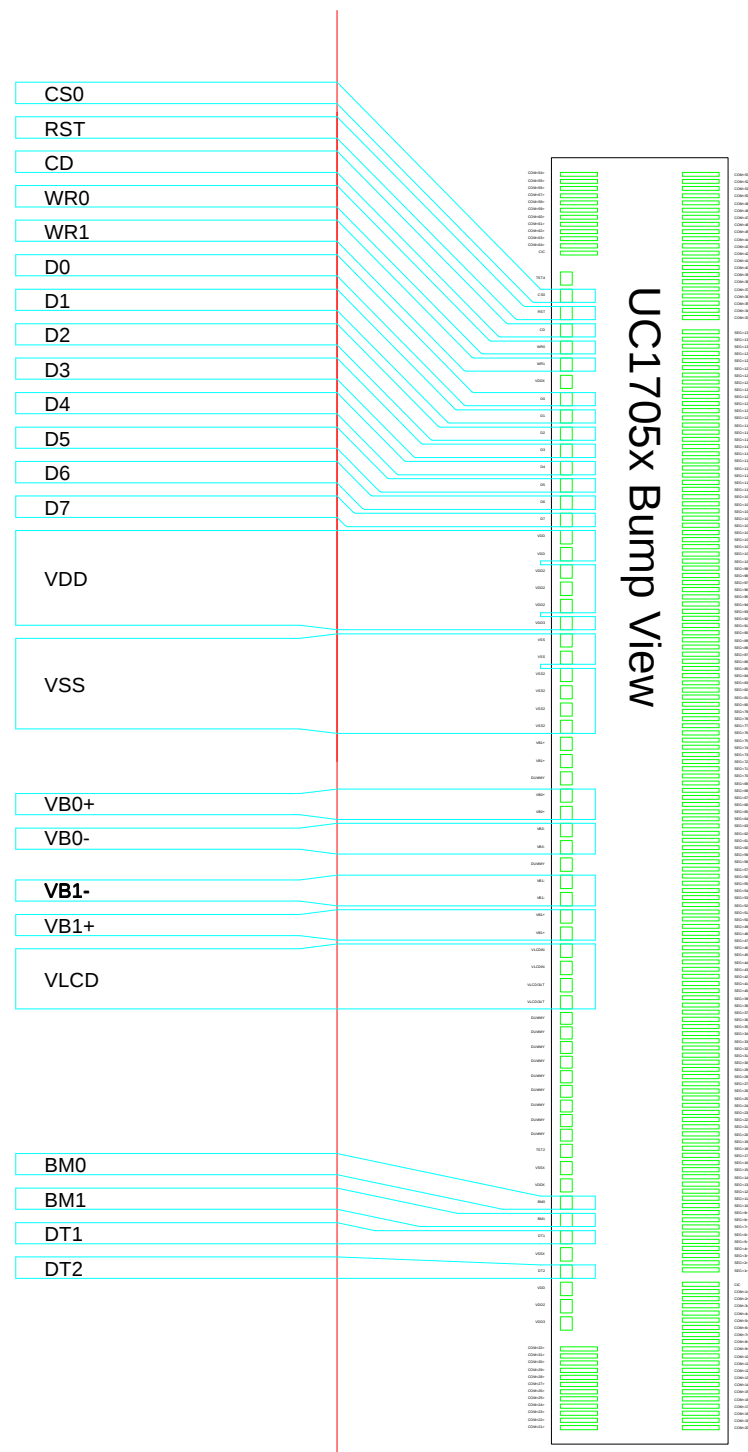NOTES FOR V_{DD} WITH COG:

The operation condition, $V_{DD}=1.8V$ (typical), should be satisfied under all operating conditions. UC1705x's peak current (I_{DD}) can be up to ~15mA during high speed data-write to UC1705x's on-chip SRAM. Such high pulsing current mandates very careful design of V_{DD} and V_{SS} ITO trances in COG modules. When V_{DD} and V_{SS} trace resistance is not low enough, the pulsing I_{DD} current can cause the actual on-chip V_{DD} to drop to below 1.65V and cause the IC to malfunction.

CONTROL REGISTERS

UC1705x contains registers, which control the chip operation. The following table is a summary of these control registers, a brief description and the default values. These registers can be modified by commands, which will be described in the next two sections, Command Table and Command Description.

Name: The Symbolic reference of the register.
Note that, some symbol name refers to bits (flags) within another register.

Default: Numbers shown in **Bold** font are default values after hardware reset.

Name	Bits	Default	Description															
SL	6	00H	Scroll Line. Scroll the displayed image up by <i>SL</i> rows. The valid SL value is between 0 (for no scrolling) and 63. Setting SL outside of this range causes undefined effects on the displayed image. This register does not affect icon output CIC.															
CA	8	00H	Column Address of DDRAM (Display Data RAM). Value range is 0~131. (Used in Host to access DDRAM)															
PA	4	0H	Page Address of DDRAM. Value range 0~8. (Used in Host to access DDRAM)															
BR	1	0H	Bias Ratio. The ratio between V _{LCD} and V _{BIAS} varies according to Duty selected: <table><tr><td></td><td>BR=0</td><td>BR=1</td></tr><tr><td>Duty=1/65</td><td>1/9</td><td>1/7</td></tr><tr><td>Duty=1/49</td><td>1/8</td><td>1/6</td></tr><tr><td>Duty=1/33</td><td>1/6</td><td>1/5</td></tr><tr><td>Duty=1/55</td><td>1/8</td><td>1/6</td></tr></table>		BR=0	BR=1	Duty=1/65	1/9	1/7	Duty=1/49	1/8	1/6	Duty=1/33	1/6	1/5	Duty=1/55	1/8	1/6
	BR=0	BR=1																
Duty=1/65	1/9	1/7																
Duty=1/49	1/8	1/6																
Duty=1/33	1/6	1/5																
Duty=1/55	1/8	1/6																
PM	6	20H	Adjust contrast of LCD panel display.															
PC	6	20H	Power Control. PC [0] : Voltage Follower. (Default 0: OFF) PC [1] : Voltage Regular. (Default 0: OFF) PC [2] : Booster Ratio. (Default 0: OFF) PC [5:3]: Resistor Ratio for V _{LCD} . (Default 100b) 000b~111b : Rb/Ra ratio setting															
CR	8	0H	Return Column Address. Useful for cursor implementation.															
AC3	1	0H	Address Control. AC3: CUM: Cursor update mode, (Default 0: OFF) When CUM=1, CA increment on write only, wrap around suspended															
DC	3	0H	Display Control: DC[0]: PXV: Pixels Inverse (bit-wise data inversion. Default 0: OFF) DC[1]: APO: All Pixels ON (Default 0: OFF) DC[2]: Display ON/OFF (Default 0: OFF) When DC[2] is set to 0, the IC will enter Sleep Mode															
LC	2	0H	LCD Control: LC[0]: MX, Mirror X SEG/Column sequence inversion (Default: OFF) LC[1]: MY, Mirror Y COM/Row sequence inversion (Default: OFF)															
APC0 APC1	8 8	90H --	Advanced Program Control. APC0 [7] : TC, V _{BIAS} temperature compensation coefficient (%-per-°C) 0b : TC curve definition = -0.05% / °C 1b : TC curve definition = -0.11% / °C APC0 [6:2] are fixed. APC0 [1:0] : WA, automatic column/row Wrap Around. WA[0] : 0: PA wrap around disable 1: PA wrap around enable. WA[1] : 0: CA wrap around disable 1: CA wrap around enable. APC1[7:0] : For UltraChip's use only. Do <i>NOT</i> use.															

Name	Bits	Default	Description
Status Registers			
BZ,	1	0	BZ : Set to 1 when system is busy. Commands can only be accepted when BZ=0.
MX,	1		MX : Mirror X-axle (i.e. SEG or column)
DE,	1		DE : Set to 1 when display enabled.
RST	1		RST : Reset flag. RST=1 when reset is in progress.

COMMAND TABLE

The following is a list of host commands supported by UC1705x

C/D: 0: Control, 1: Data
W/R: 0: Write Cycle, 1: Read Cycle
Useful Data bits – Don't Care

No	Command	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Action	Default
1.	Write Data Byte	1	0	#	#	#	#	#	#	#	#	Write 1 byte	N/A
2.	Read Data Byte	1	1	#	#	#	#	#	#	#	#	Read 1 byte	N/A
3.	Get Status	0	1	BZ	MX	DE	RST	0	0	0	0	Get Status	--
4.	Set Column Address LSB	0	0	0	0	0	0	#	#	#	#	Set CA [3:0]	0
	Set Column Address MSB			0	0	0	1	#	#	#	#	Set CA [7:4]	0
5.	Set Power Control	0	0	0	0	1	0	1	#	#	#	Set PC[2:0]	000b
6.	Set Scroll Line	0	0	0	1	#	#	#	#	#	#	Set SL[5:0]	0
7.	Set Page Address	0	0	1	0	1	1	#	#	#	#	Set PA[3:0]	0
8.	Set V _{LCD} Resistor Ratio	0	0	0	0	1	0	0	#	#	#	Set PC[5:3]	100b
9.	Set Electronic Volume (double-byte command)	0	0	1	0	0	0	0	0	0	1	Set PM[5:0]	20H
				0	0	#	#	#	#	#	#		
10.	Set All-Pixel-ON	0	0	1	0	1	0	0	1	0	#	Set DC[1]	0b
11.	Set Inverse Display	0	0	1	0	1	0	0	1	1	#	Set DC[0]	0b
12.	Set Display Enable	0	0	1	0	1	0	1	1	1	#	Set DC[2]	0b
13.	Set SEG Direction	0	0	1	0	1	0	0	0	0	#	Set LC[0]	0b
14.	Set COM Direction	0	0	1	1	0	0	#	-	-	-	Set LC[1]	0b
15.	System Reset	0	0	1	1	1	0	0	0	1	0	Software Reset	N/A
16.	NOP	0	0	1	1	1	0	0	0	1	1	No operation	N/A
17.	Set LCD Bias Ratio	0	0	1	0	1	0	0	0	1	#	Set BR	0b
18.	Set Cursor Update Mode	0	0	1	1	1	0	0	0	0	0	AC3=1, CR=CA	N/A
19.	Reset Cursor Update Mode	0	0	1	1	1	0	1	1	1	0	AC3=0, CA=CR.	N/A
20.	Set Static Indicator OFF	0	0	1	0	1	0	1	1	0	0	NOP	N/A
21.	Set Static Indicator ON	0	0	1	0	1	0	1	1	0	1	NOP	N/A
	Set Static Indicator			-	-	-	-	-	-	-	-		
22.	Set Booster Ratio (double-byte command)	0	0	1	1	1	1	1	0	0	0	NOP	00b
				0	0	0	0	0	0	#	#		
23.	Set Power Save	0	0	#	#	#	#	#	#	#	#	Display OFF & All Pixel ON	N/A
24.	Set Test Control (double-byte command)	0	0	1	1	1	1	1	1	TT		For UCI only Do NOT use	N/A
				-	#	#	#	#	#	#	#		
25.	Set Adv. Program Control 0 (double-byte command)	0	0	1	1	1	1	1	0	1	0	Set TC, WA[1:0]	90H
				#	0	0	1	0	0	#	#		
26.	Set Adv. Program Control 1 (double-byte command)	0	0	1	1	1	1	1	0	1	1	For UCI only Set APC1	N/A
				#	#	#	#	#	#	#	#		

* Other than commands listed above, all other bit patterns result in NOP (No Operation).

COMMAND DESCRIPTION

1. Write Data Byte to Memory

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Write data	1	0	8-bit data write to SRAM							

2. Read Data Byte from Memory

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Read data	1	1	8-bit data read from SRAM							

Write/Read Data Byte (Command 1,2) access Display Data RAM based on Page Address (PA) register and Column Address (CA) register. PA and CA can also be programmed directly by issuing *Set Page Address* and *Set Column Address* commands.

3. Get Status

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Get Status	0	1	BZ	MX	DE	RST	0	0	0	0

BZ: BZ=1 when busy. The system accepts commands only when BZ=0.

MX: Mirror X. Status of register LC[0]

DE: Display Enable flag. DE=1 when display is enabled.

RST: RST flag. RST=1 when reset is in progress.

4. Set Column Address

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Column Address LSB, CA[3:0]	0	0	0	0	0	0	CA3	CA2	CA1	CA0
Set Column Address MSB, CA[7:4]	0	0	0	0	0	1	CA7	CA6	CA5	CA4

Set the SRAM column address before Write/Read memory from host interface.

CA value range: 0~131

5. Set Power Control

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Power Control, PC[2:0]	0	0	0	0	1	0	1	PC2	PC1	PC0

Set PC[2:0] to enable the built-in charge pump.

PC[2] : 0 – Boost OFF

1 – Boost ON

PC[1] : 0 – Voltage Regular OFF

1 – Voltage Regular ON

PC[0] : 0 – Voltage Follower OFF


1 – Voltage Follower ON

6. Set Scroll Line

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Scroll Line, SL[5:0]	0	0	0	1	SL5	SL4	SL3	SL2	SL1	SL0

Set the scroll line number. Range : 0~63

Scroll line setting will scroll the displayed image up by SL rows. Icon output CIC will not be affected by Set Scroll Line command.

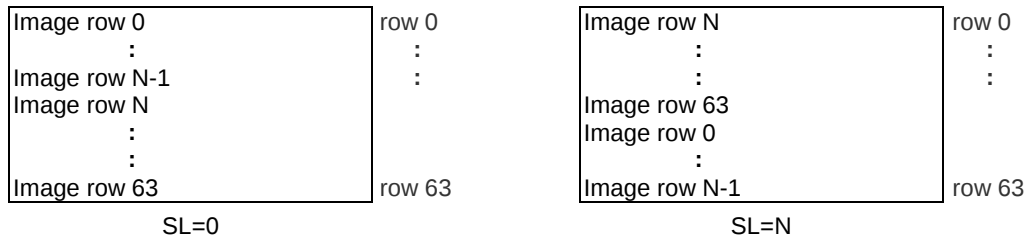

7. Set Page Address

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Page Address, PA[3:0]	0	0	1	0	1	1	PA3	PA2	PA1	PA0

Set the SRAM page address before write/read memory from host interface. Each page of SRAM corresponds to 8 COM lines on LCD panel, except for the last page. The last page corresponds to the icon output CIC.

Possible value = 0~8.

8. Set V_{LCD} Resistor Ratio

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set V _{LCD} Resistor Ratio, PC[5:3]	0	0	0	0	1	0	0	PC5	PC4	PC3

Configure PC[5:3] to set internal Resistor Ratio, Rb/Ra, for the V_{LCD} Voltage regulator to adjust the contrast of the display panel:

PC[5:3] : 000b~111b – 1+Rb/Ra ratio. Default : 100b. Refer to V_{LCD} Quick Reference for “1+Rb/Ra” ratio.

$$V_{LCD} = ((1 + Rb/Ra) \times V_{ev}) \times (1 + (T - 25) \times C_T \%) \quad V_{ev} = (1 - (63 - PM) / 162) \times V_{REF}$$

where Rb and Ra are internal resistors,
V_{REF} is on-chip contrast voltage, and
PM is a value of electronic volume

9. Set Electronic Volume

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Electronic Volume, PM[5:0]	0	0	1	0	0	0	0	0	0	1
			0	0	PM5	PM4	PM3	PM2	PM1	PM0

Set PM[5:0] for electronic volume “PM” for V_{LCD} voltage regulator to adjust contrast of LCD panel display Effective range : 0~63. Default : 32

10. Set All Pixel ON

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set All Pixel ON, DC [1]	0	0	1	0	1	0	0	1	0	DC1

Set DC[1] to force all SEG drivers to output ON signals. This function has no effect on the existing data stored in display RAM.
Default : 0

11. Set Inverse Display

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Inverse Display, DC [0]	0	0	1	0	1	0	0	1	1	DC0

Set DC[0] to force all SEG drivers to output the inverse of the data (bit-wise) stored in display RAM. This function has no effect on the existing data stored in display RAM.

12. Set Display Enable

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Display Enable, DC[2]	0	0	1	0	1	0	1	1	1	DC2

This command is for programming register DC[2]. When DC[2] is set to 1, UC1705x will first exit from sleep mode, restore the power and then turn on COM drivers and SEG drivers.

13. Set SEG Direction

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Segment Direction, LC[0]	0	0	1	0	1	0	0	0	0	MX

Set LC[0] for SEG (column) mirror (MX). **Default : 0**

MX is implemented by reversing the mapping order between RAM and SEG (column) electrodes. The data stored in RAM is not affected by MX command. Yet, MX has immediate effect on the display image.

14. Set COM Direction

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Common Direction, LC[1]	0	0	1	1	0	0	MY	-	-	-

Set LC[1] for COM (row) mirror (MY).

MY is implemented by reversing the mapping between RAM and COM (row) electrodes. The data stored in RAM is not affected by MY command. Yet, MY has immediate effect on the display image.

15. System Reset (Software Reset)

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Software Reset	0	0	1	1	1	0	0	0	1	0

This command will activate the system reset.

Some control register values will be reset to their default values. Yet, data stored in RAM will not be affected. See the “Reset and Power Management” section for more details.

16. NOP

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
No Operation	0	0	1	1	1	0	0	0	1	1

This command is used for “no operation”.

17. Set LCD Bias Ratio

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Bias Ratio, BR	0	0	1	0	1	0	0	0	1	BR

Select voltage bias ratio required for LCD. **Default : 0**

The setting of Bias ratio varies according to Duty:

DUTY	BR = 0	BR = 1
1/65	1/9	1/7
1/49	1/8	1/6
1/33	1/6	1/5
1/55	1/8	1/6

18. Set Cursor Update Mode

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Cursor Update Mode	0	0	1	1	1	0	0	0	0	0

This command is used for set cursor update mode function. When cursor update mode sets, UC1705x will update register CR with the value of register CA. The column address CA will increment with write RAM data operation but the address wraps around will be suspended no matter what WA setting is. However, the column address will not increment in read RAM data operation. The set cursor update mode can be used to implement "write after read RAM" function. The column address (CA) will be restored to the value, which is before the set cursor update mode command, when reset cursor update mode.

The purpose of this pair commands and their feature is to support "write after read" function for cursor implementation.

19. Reset Cursor Update Mode

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Reset Cursor Update Mode	0	0	1	1	1	0	1	1	1	0

Set AC3=0 and CA=CR.

20. Set Static Indicator OFF

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Turn OFF Static Indicator	0	0	1	0	1	0	1	1	0	0

No Operation.

21. Set Static Indicator ON

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Turn ON Static Indicator	0	0	1	0	1	0	1	1	0	1
	0	0	-	-	-	-	-	-	-	-

No Operation.

22. Set Booster Ratio

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Booster Ratio (Double-byte command)	0	1	1	1	1	1	1	0	0	0
			0	0	0	0	0	0	-	-

This command is used for “No Operation”.

23. Set Power Save

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Power Save	0	0	#	#	#	#	#	#	#	#

A compound command.

24. Set Test Control

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set TT (Double-byte command)	0	1	1	1	1	1	1	1	TT	
			-	#	#	#	#	#	#	#

This command is for UltraChip's Test only. Do NOT use.

25. Set Advanced Program Control 0

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Adv. Program Control, APC0 [7:0] (Double-byte command)	0	0	1	1	1	1	1	0	1	0
			TC	0	0	1	0	0	WA1	WA0

TC : APC0 [7], V_{BIAS} temperature compensation coefficient (%-per-degree-C)

Temperature compensation curve definition:

TC : 0b = -0.05%/°C, 1b = -0.11%/°C

WA : APC0 [1:0], Automatic column/row wrap around.

WA[0] : 0: PA WA disable 1: PA WA enable.

WA[1] : 0: CA WA disable 1: CA WA enable.

26. Set Advanced Program Control 1

Action	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0
Set Adv. Program Control, APC1 (Double-byte command)	0	0	1	1	1	1	1	0	1	1
			APC1 [7:0] register parameter							

For UltraChip only. Please Do NOT use.

LCD VOLTAGE SETTING

MULTIPLEX RATES

Multiplex Rate is set by DT[2:1] :

DT2	DT1	Duty
0	0	1/65
0	1	1/49
1	0	1/33
1	1	1/55

BIAS RATIO SELECTION

Bias Ratio (*BR*) is defined as the ratio between V_{LCD} and V_{BIAS} , i.e.

$$BR = V_{LCD}/V_{BIAS},$$

where $V_{BIAS} = V_{B1+} - V_{B1-} = V_{B0+} - V_{B0-}$.

The theoretical optimum *Bias Ratio* can be estimated by $\sqrt{Mux} + 1$. *BR* of value 15~20% lower/higher than the optimum value calculated above will not cause significant visible change in image quality.

UC1705x supports four *BR* as listed below. *BR* can be selected by software program.

Duty	Bias Ratio	
	BR=0	BR=1
1/65	1/9	1/7
1/49	1/8	1/6
1/33	1/6	1/5
1/55	1/8	1/6

Table 1: Bias Ratios

TEMPERATURE COMPENSATION

The temperature compensation coefficients is -0.11% per $^{\circ}\text{C}$.

V_{LCD} GENERATION

V_{LCD} is supplied by internal charge pump. The source of V_{LCD} is controlled by PC[2:0]. For good product reliability, it is recommended to keep V_{LCD} under 11.5V for all temperature conditions.

When V_{LCD} is generated internally, the voltage level of V_{LCD} is determined by three control registers: *BR* (Bias Ratio), *PM* (Potentiometer), and *PC[5:3]* (V_{LCD} Resistor Ratio) with the following relationship:

$$V_{LCD} = ((1 + R_b/R_a) \times V_{ev}) \times (1 + (T - 25) \times C_T \%)$$

$$V_{ev} = (1 - (63 - PM)/162) \times V_{REF}$$

where

R_a and R_b are two design constants, whose value depends on the setting of *BR* register, as illustrated in the table on the next page,

PM is value of electronic volume,

V_{REF} is on-chip contrast voltage,

T is the ambient temperature in $^{\circ}\text{C}$, and

C_T is temperature compensation coefficient.


V_{LCD} FINE TUNING

Black-and-white STN LCD is sensitive to even a 1% mismatch between IC driving voltage and the V_{OP} of LCD. However, it is difficult for LCD makers to guarantee such high precision matching of parts from different vendors. It is therefore necessary to adjust V_{LCD} to match the actual V_{OP} of the LCD.

For the best result, software based approach for V_{LCD} adjustment is the recommended method for V_{LCD} fine-tuning. System designers should always consider the contrast fine tuning requirement before finalizing on the LEM design

LOAD DRIVING STRENGTH

The power supply circuit of UC1705x is designed to handle LCD panels with loading up to $\sim 24\text{nF}$ using $20\text{-}\Omega/\text{Sq}$ ITO glass with $V_{DD2/3} \geq 2.5\text{V}$. For larger LCD panels, use lower resistance ITO glass packaging.

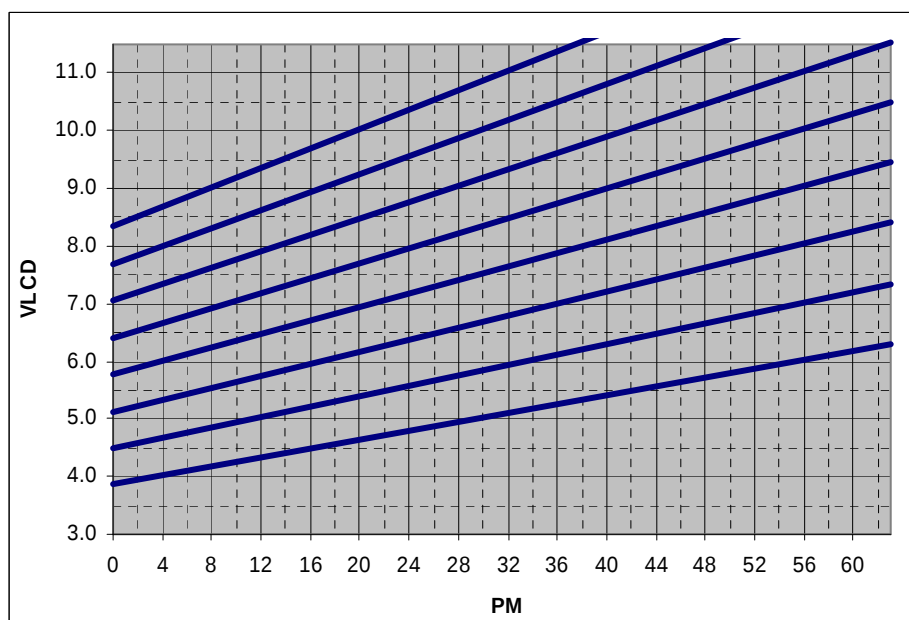V_{LCD} QUICK REFERENCEV_{LCD} Programming Curve.

PC[5:3]	1+Rb/Ra	V _{REF}	PM	V _{LCD} Range (V)
000b	3.769	1.68	0	3.87
			63	6.33
001b	4.396	1.68	0	4.51
			63	7.38
010b	5.020	1.68	0	5.15
			63	8.43
011b	5.643	1.68	0	5.79
			63	9.48
100b	6.266	1.68	0	6.43
			63	10.53
101b	6.891	1.68	0	7.08
			62	11.51
110b	7.517	1.68	0	7.72
			48	11.46
111b	8.143	1.68	0	8.36
			37	11.48

Note: For good product reliability, keep V_{LCD} under **11.5V** over all temperature.

HI-V GENERATOR AND BIAS REFERENCE CIRCUIT

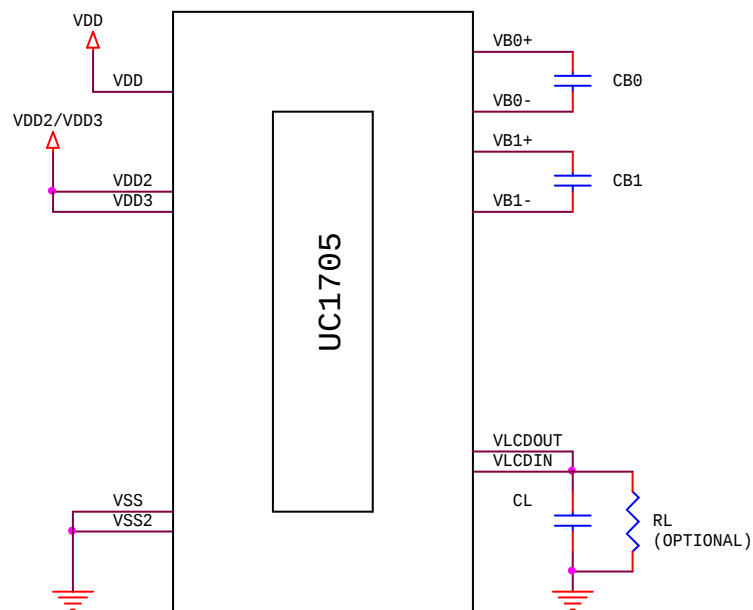


FIGURE 1: Reference circuit using internal Hi-V generator circuit

Note

Sample component values: (The illustrated circuit and component values are for reference only. Please optimize for specific requirements of each application.)

C_{BX} : 2.2 $\mu\text{F}/5\text{V}$ or 100~250x LCD load capacitance.

C_L : 330nF(25V) is appropriate for most applications.

R_L : 3.3M~10M Ω to act as a draining circuit when V_{DD} is shut down abruptly.

LCD DISPLAY CONTROLS

CLOCK & TIMING GENERATOR

UC1705x contains a built-in system clock. All required components for the clock oscillator are built-in. No external parts are required.

4 different frame rates are provided based on different Mux-Rate for system design flexibility.

DRIVER MODES

COM and SEG drivers can be in either Idle mode or Active mode, controlled by Display Enable flag (DC[2]). When SEG and COM drivers are in idle mode, they will be connected together to ensure zero DC condition on the LCD.

DRIVER ARRANGEMENTS

The naming conventions are: COMx, where x = 1–64, refers to the row driver for the x-th row of pixels on the LCD panel.

The mapping of COM(x) to LCD pixel rows is fixed and it is not affected by SL, MX or MY settings.

DISPLAY CONTROLS

There are three groups of display control flags in the control register DC: Driver Enable (DE), All-Pixel-ON (APO) and Inverse (PXV). DE has the overriding effect over PXV and APO.

DRIVER ENABLE (DE)

Driver Enable is controlled by the value of DC[2] via *Set Display Enable* command. When DC[2] is set to OFF (logic “0”), both COM and SEG drivers will become idle and UC1705x will put itself into Sleep Mode to conserve power.

When DC[2] is set to ON, the DE flag will become “1”, and UC1705x will first exit from Sleep Mode, restore the power (V_{LCD} , V_D etc.) and then turn ON COM and SEG drivers.

That is the display is turned ON after setting PC[2:0]=111b and DC[2]=1.

ALL PIXELS ON (APO)

When set, this flag will force all SEG drivers to output ON signals, disregarding the data stored in the display buffer.

This flag has no effect when Display Enable is OFF and it has no effect on data stored in RAM.

INVERSE (PXV)

When this flag set to ON, SEG drivers will output the inverse of the value it received from the display buffer RAM (bit-wise inversion). This flag has no impact on data stored in RAM.

ITO LAYOUT AND LC SELECTION

Since COM scanning pulses of UC1705x can be as short as 153μS, it is critical to control the RC delay of COM and SEG signal to minimize crosstalk and maintain good mass production consistency.

COM TRACES

Excessive COM scanning pulse RC decay can cause fluctuation of contrast and increase COM direction crosstalk.

Please limit the worst case of COM signals RC delay (RC_{MAX}) as calculated below

$$(R_{ROW} / 2.7 + R_{COM}) \times C_{ROW} < 9.23\mu S$$

where

C_{ROW} : LCD loading capacitance of one row of pixels. It can be calculated by $C_{LCD}/\text{Mux-Rate}$, where C_{LCD} is the LCD panel capacitance.

R_{ROW} : ITO resistance over one row of pixels within the active area

R_{COM} : COM routing resistance from IC to the active area + COM driver output impedance.

In addition, please limit the min-max spread of RC decay to be:

$$|RC_{MAX} - RC_{MIN}| < 2.76\mu S$$

so that the COM distortions on the top of the screen to the bottom of the screen are uniform.

(Use worst case values for all calculations)

SEG TRACES

Excessive SEG signal RC decay can cause image dependent changes of medium gray shades and sharply increase the crosstalk of SEG direction.

For good image quality, please minimize SEG ITO trace resistance and limit the worst case of SEG signal RC delay as calculated below.

$$(R_{COL} / 2.7 + R_{SEG}) \times C_{COL} < 6.30\mu S$$

where

C_{COL} : LCD loading capacitance of one pixel column. It can be calculated by $C_{LCD} / (\# \text{ of column})$, where C_{LCD} is the LCD panel capacitance.

R_{COL} : ITO resistance over one column of pixels within the active area

R_{SEG} : SEG routing resistance from IC to the active area + SEG driver output impedance.

(Use worst case values for all calculations)

SELECTING LIQUID CRYSTAL

The selection of LC material is crucial to achieve the optimum image quality of finished LCM.

When $(V_{90}-V_{10})/V_{10}$ is too large, image contrast will deteriorate, and images will look murky and dull.

When $(V_{90}-V_{10})/V_{10}$ is too small, image contrast will become too strong, and crosstalk will increase.

For the best result, it is recommended the LC material has the following characteristics:

$$(V_{90}-V_{10})/V_{10} = (V_{ON}-V_{OFF})/V_{OFF} \times 0.72 \sim 0.80$$

where V_{90} and V_{10} are the LC characteristics, and V_{ON} and V_{OFF} are the ON and OFF V_{RMS} voltage produced by LCD driver IC at the specific Mux-rate.

Example:

Duty	Bias	$V_{ON}/V_{OFF} - 1$	x0.80	x0.72
1/65	1/9	10.6%	9.6%	7.5%

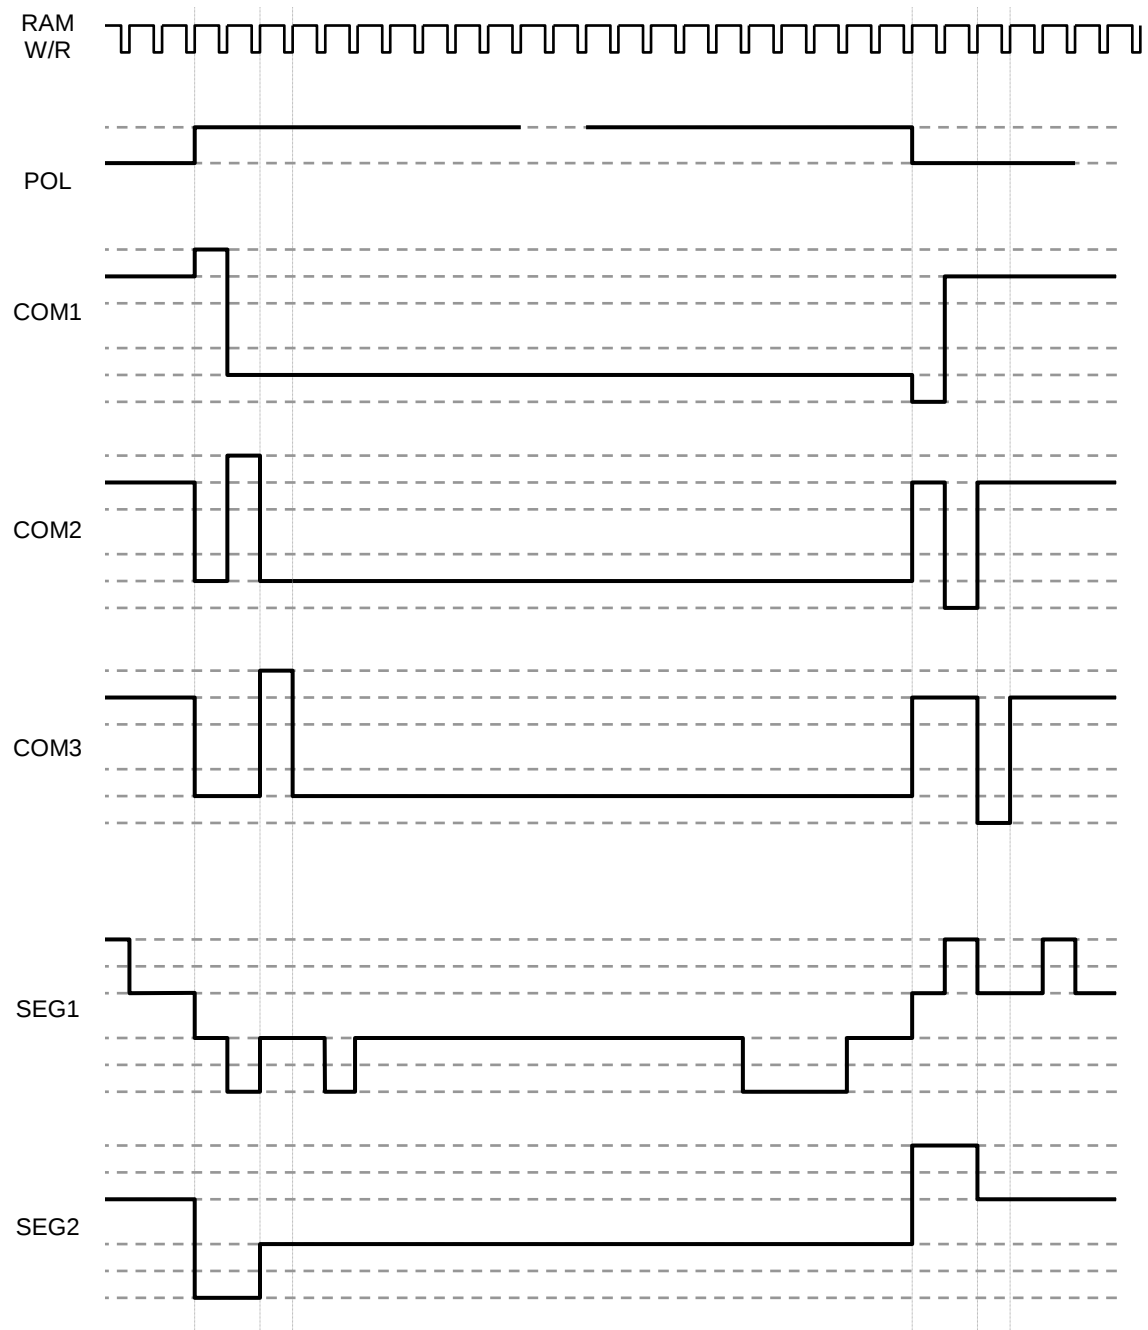


FIGURE 2: COM and SEG Electrode Driving Waveform

THE COMMON OUTPUT STATUS SELECT CIRCUIT

In the UC1705x chips, the COM output scan direction can be selected by the common output status select command. (See the table below for details.) Consequently, the constraints in IC layout at the time of LCD module assembly can be minimized.

Duty	Direction	COM [1:16]	COM [17:24]	COM [25:27]	COM [28:37]	COM [38:40]	COM [41:48]	COM [49:64]	COMS
1/65	0	COM [1:64]							COMS
	1	COM [64:1]							
1/49	0	COM[1:24]		NC			COM [25:48]		COMS
	1	COM[48:25]		NC			COM [24:1]		
1/33	0	COM[1:16]	NC					COM[17:32]	COMS
	1	COM[32:17]	NC					COM[16:1]	
1/55	0	COM [1:27]			NC	COM [28:54]			COMS
	1	COM [54:28]			NC	COM [27:1]			

Table 2: Duty Layout

HOST INTERFACE

As summarized in the table below, UC1705x supports two 8-bit parallel bus protocols and one serial bus protocol. Designers can choose either the 8-bit parallel bus to achieve high data transfer rate, or use serial bus to create compact LCD modules and minimize connector pins.

		Bus Type		
		8080	6800	S8 (4-wire)
Width		8-bit	8-bit	Serial
Access		Read / Write		Write only
Control & Data Pins	BM[1:0]	10	11	00
	CS0	Chip Select		
	CD	Control/Data		
	WR0	$\overline{\text{WR}}$	$\text{R}/\overline{\text{W}}$	–
	WR1	RD	EN	–
	DB[5:0]	Data		–
	DB[7:6]	Data		DB[6]=SCK, DB[7]=SDA

* Connect unused control pins and data bus pins to V_{DD} or V_{SS}

	CS Disable Bus Interface	CS Init. Bus State	RESET Init. Bus State
8-bit	✓	–	✓
S8	✓	✓	✓

- CS disable bus interface – CS can be used to disable Bus Interface Write / Read Access.
- RESET can be pin reset / soft reset.

Table 3: Host interfaces Summary

PARALLEL INTERFACE

The timing relationship between UC1705x internal control signal RD, WR and their associated bus actions are shown in the figure below.

The Display RAM read interface is implemented as a two-stage pipeline. This architecture requires that, every time memory address is modified, either in parallel mode or serial mode, by either Set CA or Set PA command, a dummy read

cycle need to be performed before the actual data can propagate through the pipeline and be read from data port D[7:0].

There is no pipeline in write interface of Display RAM. Data is transferred directly from bus buffer to internal RAM on the rising edges of write pulses.

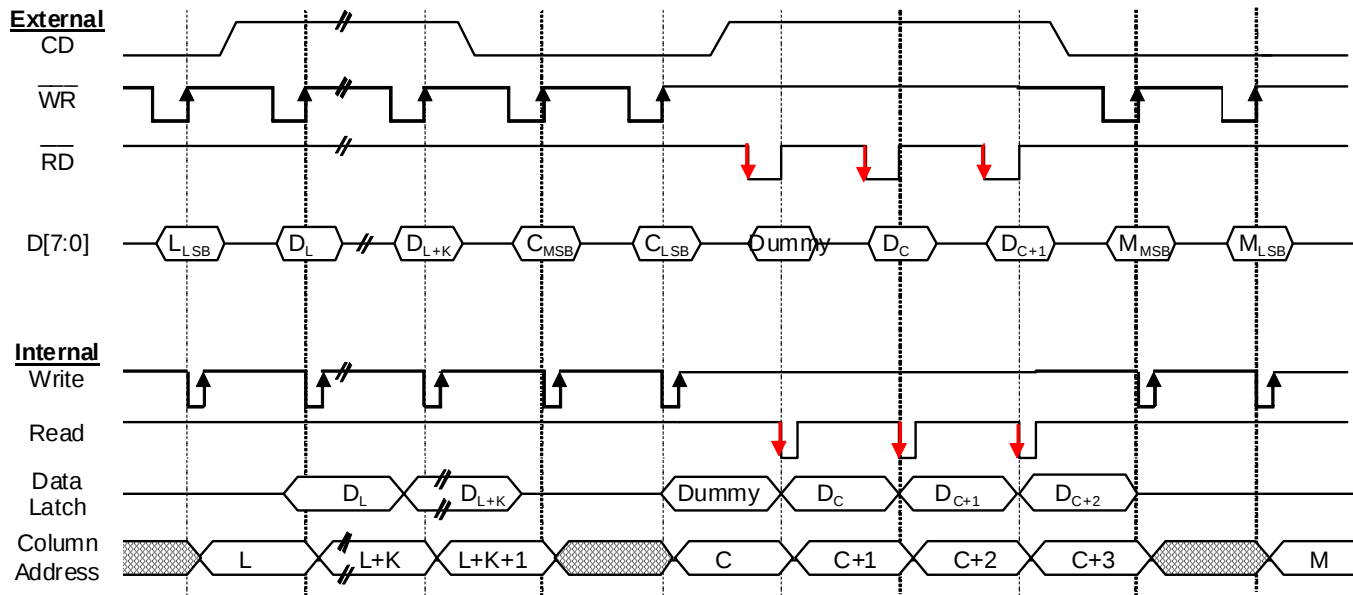


Figure 3: Parallel Interface & Related Internal Signals

SERIAL INTERFACE

UC1705x supports 1 serial mode: 4-wire SPI mode (S8). Bus interface mode is determined by the wiring of the BM[1:0]. See table in last page for more detail.

S8 (4-WIRE) INTERFACE

Only write operations are supported in 4-wire serial mode. Pins CS[1:0] are used for chip select and bus cycle reset. Pin CD is used to determine the content of the data been transferred. During each write cycle, 8 bits of data, MSB first, are latched on eight rising SCK edges into an 8-bit data holder.

If CD=0, the data byte will be decoded as command. If CD=1, this 8-bit will be treated as data and transferred to proper address in the Display Data RAM on the rising edge of the last SCK pulse.

Pin CD is examined when SCK is pulled low for the LSB (D0) of each token.

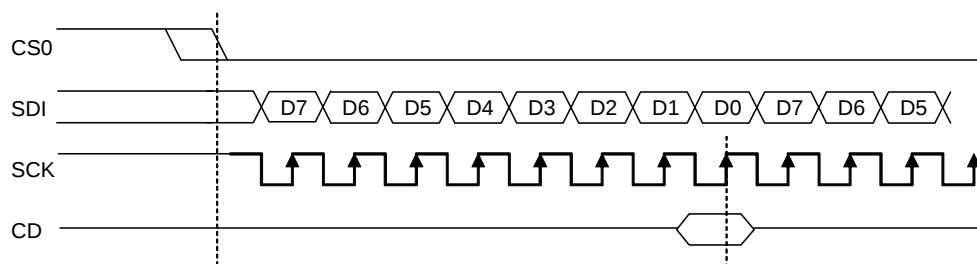


Figure 4: 4-wire Serial Interface (S8)

HOST INTERFACE REFERENCE CIRCUIT

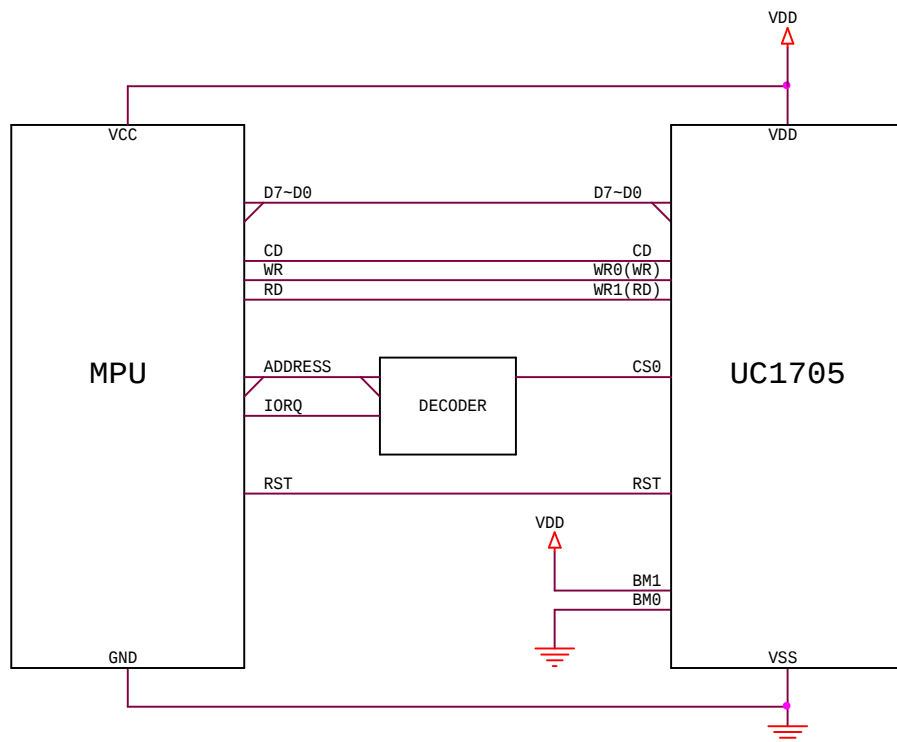


FIGURE 5: 8080/8bit parallel mode reference circuit

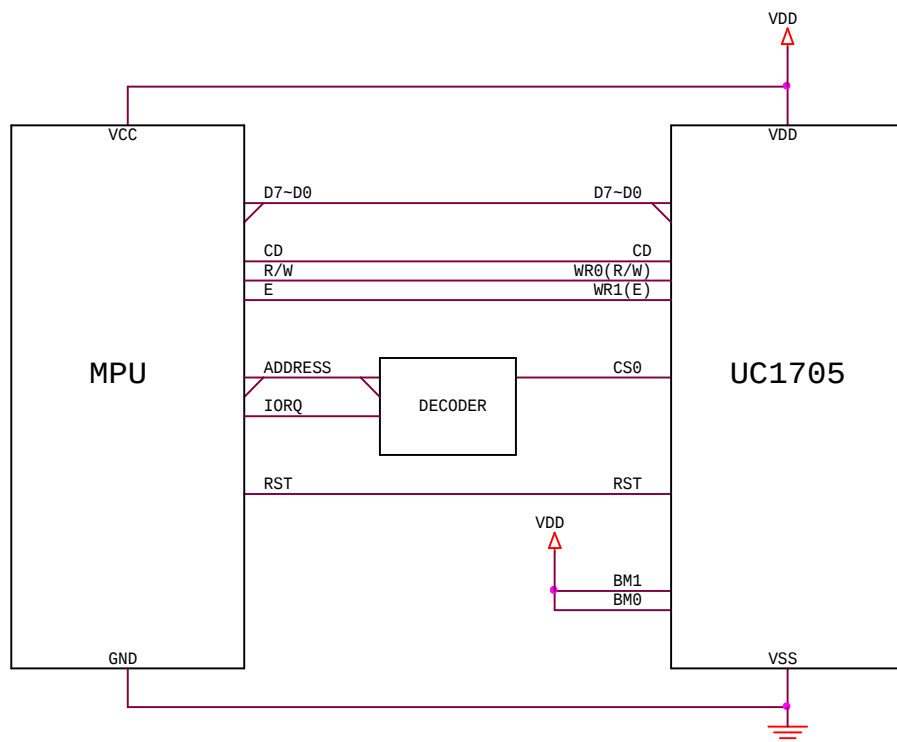


FIGURE 6: 6800/8bit parallel mode reference circuit

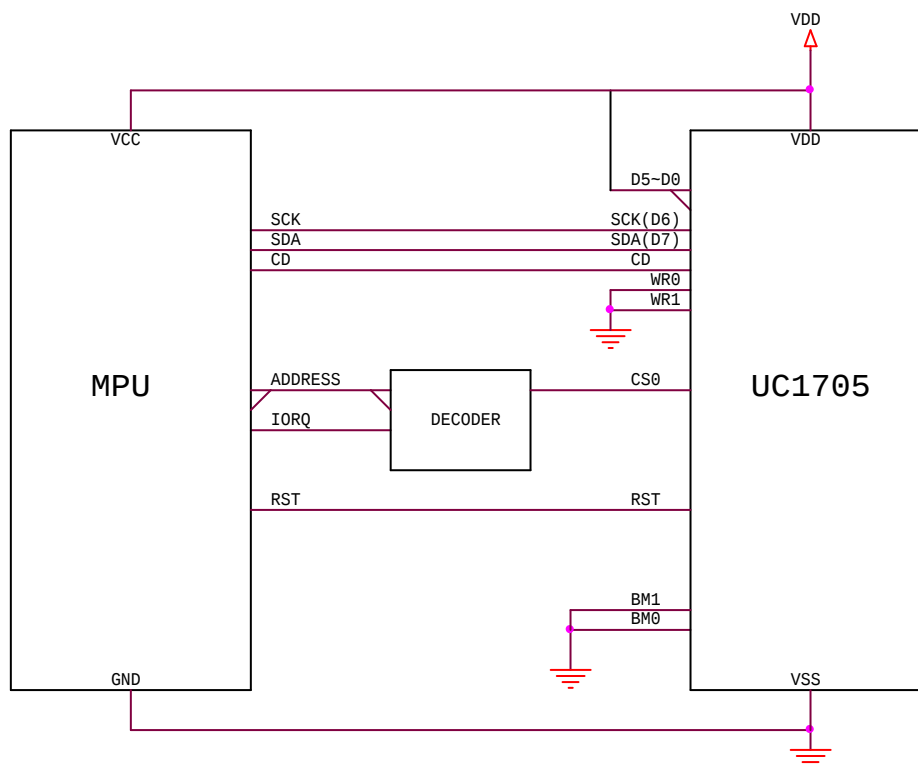


FIGURE 7: Serial-8 serial mode reference circuit

Note

- The ID pins are for production control. The connection will affect the content of D[7] of the 1st byte of the Get Status command. Connect to V_{DD} for "H" or V_{SS} for "L".

DISPLAY DATA RAM (DDRAM)

DATA ORGANIZATION

The input display data is stored to a dual port static DDRAM (DDRAM, for Display Data RAM) organized as 65x132.

After setting CA and RA, the subsequent data write cycle will store the data for the specified pixel to the proper memory location.

Please refer to the map in the following page between the relation of COM, SEG, SRAM, and various memory control registers.

DISPLAY DATA RAM ACCESS

The Display RAM is a special purpose dual port RAM which allows asynchronous access to both its column and row data. Thus, RAM can be independently accessed both for Host Interface and for display operations.

DISPLAY DATA RAM ADDRESSING

A Host Interface (HI) memory access operation starts with specifying Row Address (RA) and Column Address (CA) by issuing *Set Row Address* and *Set Column Address* commands.

MX IMPLEMENTATION

Column Mirroring (MX) is implemented by selecting either (CA) or (131–CA) as the RAM column address. Changing MX affects the data written to the RAM.

Since MX has no effect of the data already stored in RAM, changing MX does not have immediate effect on the displayed pattern. To refresh the display, refresh the data stored in RAM after setting MX.

ROW MAPPING

COM electrode scanning orders are not affected by Start Line (SL), Fixed Line (FLT & FLB) or Mirror Y (MY, LC[3]). Visually,

register SL having a non-zero value is equivalent to scrolling the LCD display up or down (depends on MY) by SL rows.

RAM ADDRESS GENERATION

The mapping of the data stored in the display SRAM and the scanning electrodes can be obtained by combining the fixed Rm scanning sequence and the following RAM address generation formula.

During the display operation, the RAM line address generation can be mathematically represented as following:

For the 1st line period of each field

$$Line = SL$$

Otherwise

$$Line = \text{Mod}(Line+1, 64)$$

Where Mod is the modular operator, and Line is the bit slice line address of RAM to be outputted to column drivers. Line 0 corresponds to the first bit-slice of data in RAM.

The above Line generation formula produce the "loop around" effect as it effectively resets Line to 0 when Line+1 reaches 64.

MY IMPLEMENTATION

Row Mirroring (MY) is implemented by reversing the mapping order between row electrodes and RAM, i.e. the mathematical address generation formula becomes:

For the 1st line period of each field

$$Line = \text{Mod}(SL + MR - 1, 64)$$

Otherwise

$$Line = \text{Mod}(Line-1, 64)$$

Visually, the effect of MY is equivalent to flipping the display upside down. The data stored in display RAM is not affected by MY.

PA[3:0]	0	Line AddrC																	Panel Location	MY=0		MY=1						
			SL=0	SL=16	SL=0	SL=0	SL=25	SL=25																				
0000	D0	00H	0	1																COM1	C1	C49	C64	C48	C25	C9		
	D1	01H	0	1																COM2	C2	C50	C63	C47	C24	C8		
	D2	02H	0	0																COM3	C3	C51	C62	C46	C23	C7		
	D3	03H	0	0																COM4	C4	C52	C61	C45	C22	C6		
	D4	04H	0	1																COM5	C5	C53	C60	C44	C21	C5		
	D5	05H	1	1																COM6	C6	C54	C59	C43	C20	C4		
	D6	06H	1	0																COM7	C7	C55	C58	C42	C19	C3		
	D7	07H	1	0																COM8	C8	C56	C57	C41	C18	C2		
0001	D0	08H																		COM9	C9	C57	C56	C40	C17	C1		
	D1	09H																		COM10	C10	C58	C55	C39	C16	---		
	D2	0AH																		COM11	C11	C59	C54	C38	C15	---		
	D3	0BH																		COM12	C12	C60	C53	C37	C14	---		
	D4	0CH																		COM13	C13	C61	C52	C36	C13	---		
	D5	0DH																		COM14	C14	C62	C51	C35	C12	---		
	D6	0EH																		COM15	C15	C63	C50	C34	C11	---		
	D7	0FH																		COM16	C16	C64	C49	C33	C10	---		
0010	D0	10H																		COM17	C17	C1	C48	C32	C9	---		
	D1	11H																		COM18	C18	C2	C47	C31	C8	---		
	D2	12H																		COM19	C19	C3	C46	C30	C7	---		
	D3	13H																		COM20	C20	C4	C45	C29	C6	---		
	D4	14H																		COM21	C21	C5	C44	C28	C5	---		
	D5	15H																		COM22	C22	C6	C43	C27	C4	---		
	D6	16H																		COM23	C23	C7	C42	C26	C3	---		
	D7	17H																		COM24	C24	C8	C41	C25	C2	---		
0011	D0	18H																		COM25	C25	C9	C40	C24	C1	---		
	D1	19H																		COM26	C26	C10	C39	C23	C64	C48*		
	D2	1AH																		COM27	C27	C11	C38	C22	C63	C47		
	D3	1BH																		COM28	C28	C12	C37	C21	C62	C46		
	D4	1CH																		COM29	C29	C13	C36	C20	C61	C45		
	D5	1DH																		COM30	C30	C14	C35	C19	C60	C44		
	D6	1EH																		COM31	C31	C15	C34	C18	C59	C43		
	D7	1FH																		COM32	C32	C16	C33	C17	C58	C42		
0100	D0	20H																		COM33	C33	C17	C32	C16	C57	C41		
	D1	21H																		COM34	C34	C18	C31	C15	C56	C40		
	D2	22H																		COM35	C35	C19	C30	C14	C55	C39		
	D3	23H																		COM36	C36	C20	C29	C13	C54	C38		
	D4	24H																		COM37	C37	C21	C28	C12	C53	C37		
	D5	25H																		COM38	C38	C22	C27	C11	C52	C36		
	D6	26H																		COM39	C39	C23	C26	C10	C51	C35		
	D7	27H																		COM40	C40	C24	C25	C9	C50	C34		
0101	D0	28H																		COM41	C41	C25	C24	C8	C49	C33		
	D1	29H																		COM42	C42	C26	C23	C7	C48	C32		
	D2	2AH																		COM43	C43	C27	C22	C6	C47	C31		
	D3	2BH																		COM44	C44	C28	C21	C5	C46	C30		
	D4	2CH																		COM45	C45	C29	C20	C4	C45	C29		
	D5	2DH																		COM46	C46	C30	C19	C3	C44	C28		
	D6	2EH																		COM47	C47	C31	C18	C2	C43	C27		
	D7	2FH																		COM48	C48	C32	C17	C1	C42	C26		
0110	D0	30H																		COM49	C49	C33	C16	---	C41	C25		
	D1	31H																		COM50	C50	C34	C15	---	C40	C24		
	D2	32H																		COM51	C51	C35	C14	---	C39	C23		
	D3	33H																		COM52	C52	C36	C13	---	C38	C22		
	D4	34H																		COM53	C53	C37	C12	---	C37	C21		
	D5	35H																		COM54	C54	C38	C11	---	C36	C20		
	D6	36H																		COM55	C55	C39	C10	---	C35	C19		
	D7	37H																		COM56	C56	C40	C9	---	C34	C18		
0111	D0	38H																		COM57	C57	C41	C8	---	C33	C17		
	D1	39H																		COM58	C58	C42	C7	---	C32	C16		
	D2	3AH																		COM59	C59	C43	C6	---	C31	C15		
	D3	3BH																		COM60	C60	C44	C5	---	C30	C14		
	D4	3CH																		COM61	C61	C45	C4	---	C29	C13		
	D5	3DH																		COM62	C62	C46	C3	---	C28	C12		
	D6	3EH																		COM63	C63	C47	C2	---	C27	C11		
	D7	3FH																		COM64	C64	C48	C1	---	C26	C10		
1000	D0	40H																		CIC	CIC	CIC	CIC	CIC	CIC	CIC		

RESET & POWER MANAGEMENT

TYPES OF RESET

UC1705x has 2 different types of reset: Pin Reset (hardware reset) and System Reset (Software reset). Pin Reset is activated by connecting the RST pin to ground; while System Reset is performed by software commands. After each power-up, a Pin Reset, which is in 3mS, is required. In the following discussions, reset means Pin Reset.

The differences between pin reset (hardware reset) and system reset (software reset) :

Procedure	Pin Reset (hardware reset)	System Reset (software reset)
Display OFF: DC[2]=0, all SEGs/COMs output at V_{SS}	V	X
Normal Display: DC[0]=0, DC[1]=0	V	X
SEG Normal Direction: MX=0	V	X
Clear Serial Counter and Shift Register (if using Serial Interface)	V	X
Bias Selection: BR=0	V	X
Booster Level BL[1:0]=0	V	X
Exit Power Saving Mode	V	X
Power Control OFF: PC[2:0]=000b	V	X
Exit Cursor Update mode	V	V
Scroll Line SL[5:0]=0	V	V
Column Address CA[7:0]=0	V	V
Page Address PA[3:0]=0	V	V
COM Normal Direction: MY=0	V	V
V_{LCD} Regulation Ratio PC[5:3]=100b	V	V
PM[5:0]=10 0000b	V	V
Exit Test Mode	V	V

RESET STATUS

When UC1705x enters RESET sequence:

- Operation mode will be "Reset"
- All control registers are reset to default values. Refer to Control Registers for details of their default values.

OPERATION MODES

UC1705x has three operating modes (OM):
Reset, Sleep, Normal.

For each mode, the related statuses are as below:

Mode	Reset	Sleep	Normal
OM	00	10	11
Host Interface	Active	Active	Active
Clock	OFF	OFF	ON
LCD Drivers	OFF	OFF	ON
Charge Pump	OFF	OFF	ON
Draining Circuit	ON	ON	OFF

Table 4: Operating Modes

CHANGING OPERATION MODE

There are 2 commands that will initiate OM transitions:
Set Display Enable, and *System Reset*.

When DC[2] is modified by *Set Display Enable*, OM will be updated automatically. There is no other action required to enter sleep mode.

OM changes are synchronized with the edges of UC1705x internal clock. To ensure consistent system states, wait at least 10 μ S after Set Display Enable or System Reset command.

Action	Mode	OM
RST_ pin pulled "L"	Reset	00
Set Driver Enable to "0"	Sleep	10
Set Driver Enable to "1"	Normal	11

Table 5: OM changes

Both Reset mode and Sleep mode drain the charges stored in the external capacitors C_{B0} , C_{B1} , and C_L . When entering Reset mode or Sleep mode, the display drivers will be disabled.

The difference between Sleep mode and Reset mode is that, Reset mode clears all control registers and restores them to default values, while Sleep mode retains all the control registers values set by the user.

It is recommended to use Sleep Mode for Display OFF operations as UC1705x consumes very little energy in Sleep mode (typically under 5 μ A).

EXITING SLEEP MODE

UC1705x contains internal logic to check whether V_{LCD} and V_{BIAS} are ready before releasing COM and SEG drivers from their idle states. When exiting Sleep or Reset mode, COM and SEG drivers will not be activated until UC1705x internal voltage sources are restored to their proper values.

POWER-UP SEQUENCE

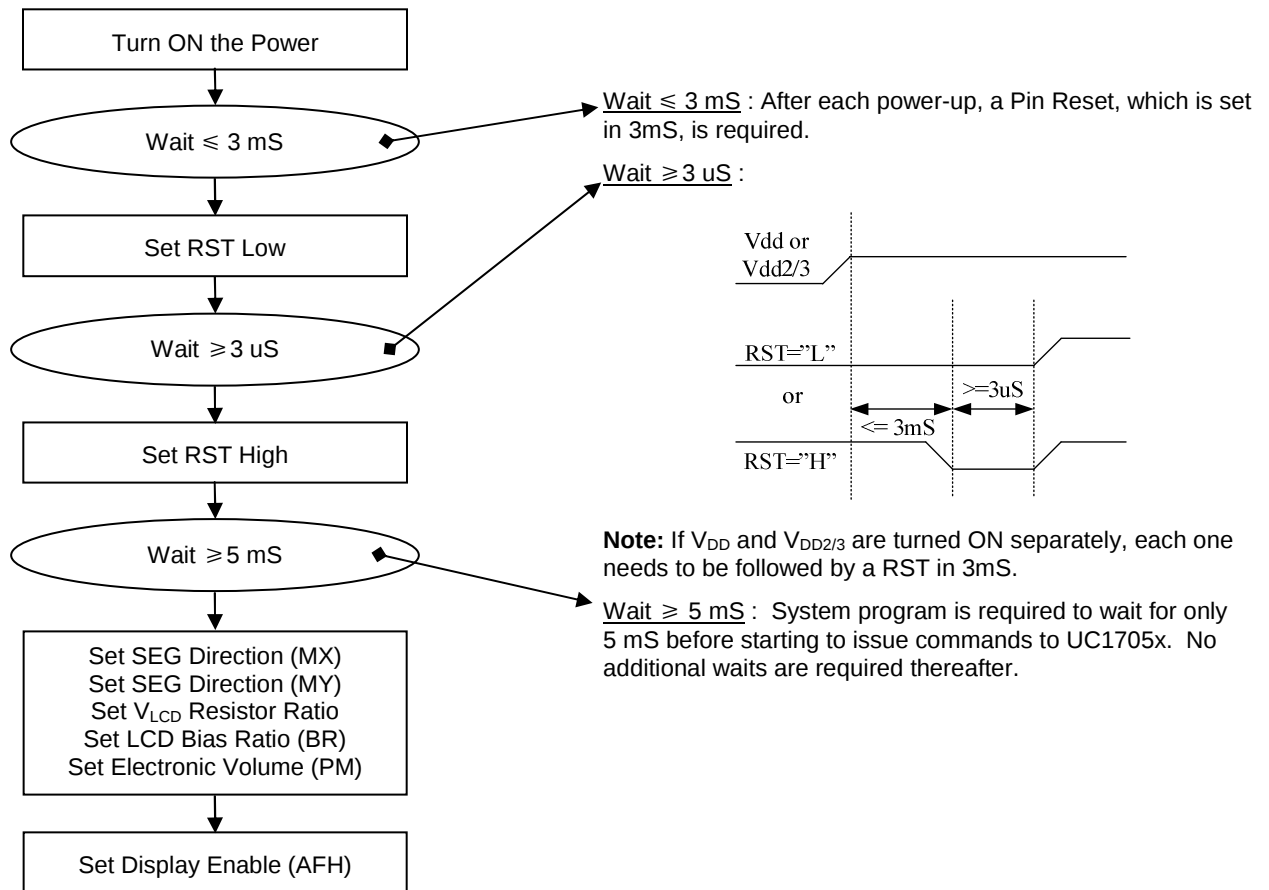


Figure 8: Reference Power-Up Sequence

There's no delay needed while turning ON V_{DD} and $V_{DD2/3}$, and either one can be turned on first:

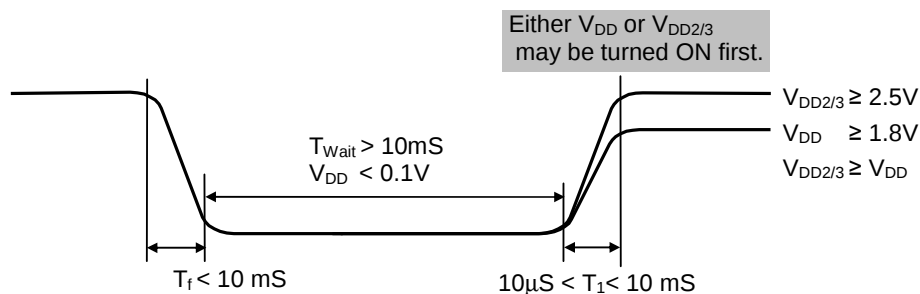


Figure 9: Power Off-On Sequence

ENTER/EXIT SLEEP MODE SEQUENCE

UC1705x enters Sleep mode from Display mode by issuing Set Display Disable command and setting all-pixel-ON.

To exit Sleep mode, set All-pixel-OFF.

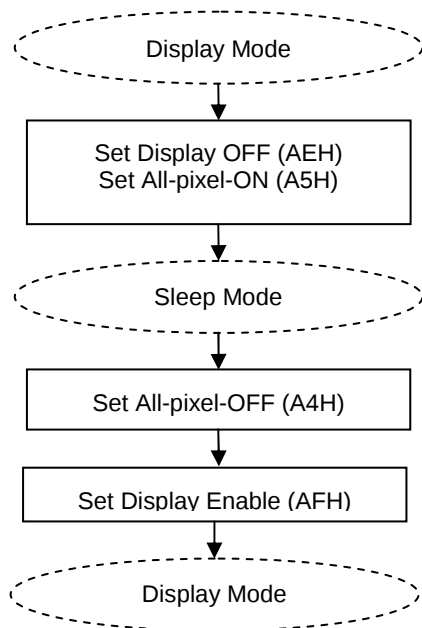


FIGURE 10: Reference Enter/Exit Sleep Mode Sequence

POWER-DOWN SEQUENCE

To prevent the charge stored in capacitor C_L causing abnormal residue horizontal line on display when V_{DD} is switched off, use Reset mode to enable the built-in charge draining circuit to discharge these external capacitors.

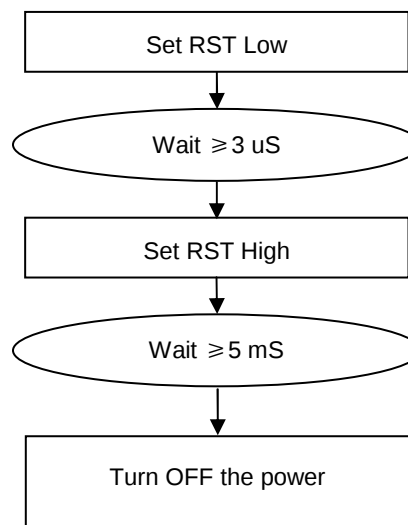


FIGURE 11: Reference Power-Down Sequence

SAMPLE COMMAND SEQUENCES FOR POWER MANAGEMENT

The following tables are examples of command sequence for power-up, power-down and display ON/OFF operations. These are only to demonstrate some "typical, generic" scenarios. Designers are encouraged to study related sections of the datasheet and find out what the best parameters and control sequences are for their specific design needs.

C/D The type of the interface cycle. It can be either Command (0) or Data (1)
W/R The direction of data flow of the cycle. It can be either Write (0) or Read (1).
Type Required: These items are required
Customized: These items are not necessary if customer parameters are the same as default
Advanced: We recommend new users to skip these commands and use default values.
Optional: These commands depend on what users want to do.

POWER-UP

Type	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Chip action	Comments
R	—	—	—	—	—	—	—	—	—	—	Turn ON V _{DD} and V _{DD2/3}	Wait until V _{DD} , V _{DD2/3} are stable
R	—	—	—	—	—	—	—	—	—	—	Wait ≤ 3 mS	
R	—	—	—	—	—	—	—	—	—	—	Set RST pin Low	Wait 3 uS after RST is Low
R	—	—	—	—	—	—	—	—	—	—	Set RST pin High	Wait 5 mS after RST is High
O	0	0	1	1	1	1	1	0	1	0	Set Adv. Program Control 0	Set Wrap Around Enable
			1	0	0	1	0	0	1	1		
R	0	0	1	0	1	0	0	0	0	#	Set SEG Direction	Set up LCD format specific parameters, MX, MY, etc.
R	0	0	1	1	0	0	#	—	—	—	Set COM Direction	
R	0	0	0	0	1	0	0	#	#	#	Set V _{LCD} Resistor Ratio	LCD specific operating voltage setting
R	0	0	1	0	1	0	0	0	1	#	Set LCD Bias Ratio	
R	0	0	1	0	0	0	0	0	0	1	Set Electronic Volume	
O	1	0	#	#	#	#	#	#	#	#	Write display RAM	Set up display image
	.	.	.	.	.	.	.	.	.	.		
	.	.	.	.	.	.	.	.	.	.		
	1	0	#	#	#	#	#	#	#	#		
R	0	0	0	0	1	0	1	1	1	1	Set Power Control	
R	0	0	1	0	1	0	1	1	1	1	Set Display Enable	

POWER-DOWN

Type	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Chip action	Comments
R	0	0	1	1	1	0	0	0	1	0	System Reset	
R	—	—	—	—	—	—	—	—	—	—	Draining capacitor	Wait ~5mS before V _{DD} OFF

DISPLAY-OFF

Type	C/D	W/R	D7	D6	D5	D4	D3	D2	D1	D0	Chip action	Comments
R	0	0	1	0	1	0	1	1	1	0	Set Display Disable	
C	1	0	#	#	#	#	#	#	#	#	Write display RAM	Set up display image (Image update is optional. Data in the RAM is retained through the SLEEP state.)
	.	.	.	.	.	.	.	.	.	.		
	.	.	.	.	.	.	.	.	.	.		
	1	0	#	#	#	#	#	#	#	#		
R	0	0	1	0	1	0	1	1	1	1	Set Display Enable	

ESD CONSIDERATION

UC1700 series products usually are provided in bare die format to customers. This makes the product particularly sensitive to ESD damage during handling and manufacturing process. It is, therefore, highly recommended that LCM makers strictly follow the "JESD 625-A Requirements for Handling Electrostatic-Discharge-Sensitive (ESDS) Devices" when manufacturing LCM.

The following pins in UC1705x require special "ESD Sensitivity" consideration in particular:

Test Mode Pins		Machine Mode		Human Body Mode	
		V _{DD}	V _{SS}	V _{DD}	V _{SS}
LCD Driver		150V	150V	2000V	1500V
LCM Digital Interface		300V	250V	3000V	3000V
LCM HV Interface	TST1/2/4	300V	300V	3000V	3000V
	C _B pins	300V	300V	3000V	3000V
	V _{LCDIN}	250V	300V	3000V	3000V
	V _{LCDOUT}	300V	300V	3000V	3000V
PWR/GND		--	300V	--	3000V

According to UltraChip's Mass Production experiences, the ESD tolerance conditions are believed to be very stable and can produce high yield in multiple customer sites. However, special care is still required during handling and manufacturing process to avoid unnecessary yield loss due to ESD damages.

ABSOLUTE MAXIMUM RATINGS

In accordance with IEC134 - notes 1, 2 and 3.

Symbol	Parameter	Min.	Max.	Unit
V_{DD}	Logic Supply voltage	-0.3	+4.0	V
V_{DD2}	LCD Generator Supply voltage	-0.3	+4.0	V
V_{DD3}	Analog Circuit Supply voltage	-0.3	+4.0	V
$V_{DD2/3} - V_{DD}$	Voltage difference between V_{DD} and $V_{DD2/3}$	--	1.2	V
V_{LCD}	LCD Generated voltage	-0.3	+13.2	V
V_{IN} / V_{OUT}	Any input/output	-0.4	$V_{DD} + 0.3$	V
T_{OPR}	Operating temperature range	-30	+85	°C
T_{STR}	Storage temperature	-55	+125	°C

Notes

1. V_{DD} is based on $V_{SS} = 0V$
2. Stress values listed above may cause permanent damages to the device.

SPECIFICATIONS

DC CHARACTERISTICS

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{DD}	Supply for digital circuit		1.65	1.8~3.3	3.6	V
$V_{DD2/3}$	Supply for bias & pump		2.5	2.6~3.3	3.6	V
V_{LCD}	Charge pump output	$V_{DD2/3} \geq 2.5V, 25^{\circ}C$			11.5	V
V_D	LCD data voltage	$V_{DD2/3} \geq 2.5V, 25^{\circ}C$	0.80		1.32	V
V_{IL}	Input logic LOW				$0.2V_{DD}$	V
V_{IH}	Input logic HIGH		$0.8V_{DD}$			V
V_{OL}	Output logic LOW				$0.2V_{DD}$	V
V_{OH}	Output logic HIGH		$0.8V_{DD}$			V
I_{IL}	Input leakage current				1.5	μA
I_{SB}	Standby current	$V_{DD} = V_{DD2/3} = 3.3V,$ $Temp = 85^{\circ}C$			50	μA
C_{IN}	Input capacitance			5	10	PF
C_{OUT}	Output capacitance			5	10	PF
$R_{0(SEG)}$	SEG output impedance	$V_{LCD} = 11V$		2000	3000	Ω
$R_{0(COM)}$	COM output impedance	$V_{LCD} = 11V$		2000	3000	Ω
F_{FR}	Average Frame Rate	Duty=1/65	-10%	77	+10%	Hz
		Duty=1/49		153		
		Duty=1/33		76		
		Duty=1/55		136		

POWER CONSUMPTION

$V_{DD} = 2.7V,$
 $V_{LCD} = 8.49V$
Mux Rate = 65,
 $C_B = 2.2\mu F$

Bias Ratio = 0b,
Frame Rate = 77Hz,
Bus mode = 6800,
Temperature = $25^{\circ}C$

PM = 32,
 $C_L = 330nF,$
All outputs are open circuit.

Display Pattern	Conditions	Typ.	Max.	Unit
All-OFF	Bus = idle	190	304	μA
2-pixel checker	Bus = idle	192	308	μA
1-pixel checker	Bus = idle	203	325	μA
-	Bus = idle (standby current)	-	5	μA

AC CHARACTERISTICS

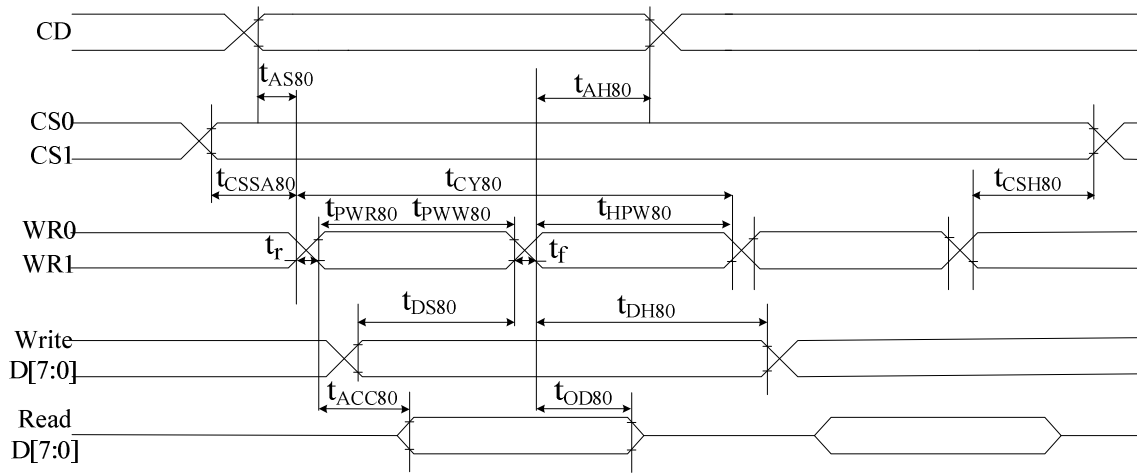


FIGURE 12: Parallel Bus Timing Characteristics (for 8080 MCU)

Symbol	Signal	Description	Condition	Min.	Max.	Unit
(2.5V ≤ V _{DD} < 3.3V, Ta= −30 to +85 ^o C) (Read / Write)						
t _{AS80} t _{AH80}	CD	Address setup time Address hold time		0 5	—	nS
t _{CSSA80} t _{CSH80}	CS1/CS0	Chip select setup time Chip select hold time		5 5	—	nS
t _{CY80}	WR0, WR1	Cycle time		150 / 110	—	nS
t _{PWR80} , t _{PWW80}		Pulse width		60 / 40		
t _{HPW80}		High pulse width		60 / 40		
t _{DS80} t _{DH80}	D7~D0 (Write)	Data setup time Data hold time		--- / 30 --- / 0	—	nS
t _{ACC80} t _{OD80}	D7~D0 (Read)	Read access time Output disable time	C _L = 100pF	— / --- 20 / ---	60 —	nS
(1.65V ≤ V _{DD} < 2.5V, Ta= −30 to +85 ^o C) (Read / Write)						
t _{AS80} t _{AH80}	CD	Address setup time Address hold time		0 0	—	nS
t _{CSSA80} t _{CSH80}	CS1/CS0	Chip select setup time Chip select hold time		5 5	—	nS
t _{CY80}	WR0, WR1	System cycle time		270 / 190	—	nS
t _{PWR80} , t _{PWW80}		Pulse width		120 / 80		
t _{HPW80}		High pulse width		120 / 80		
t _{DS80} t _{DH80}	D7~D0 (Write)	Data setup time Data hold time		--- / 60 --- / 0	—	nS
t _{ACC80} t _{OD80}	D7~D0 (Read)	Read access time Output disable time	C _L = 100pF	— / --- 50 / ---	100 —	nS

Note: tr (rising time), tf (falling time) : ≤ 15nS

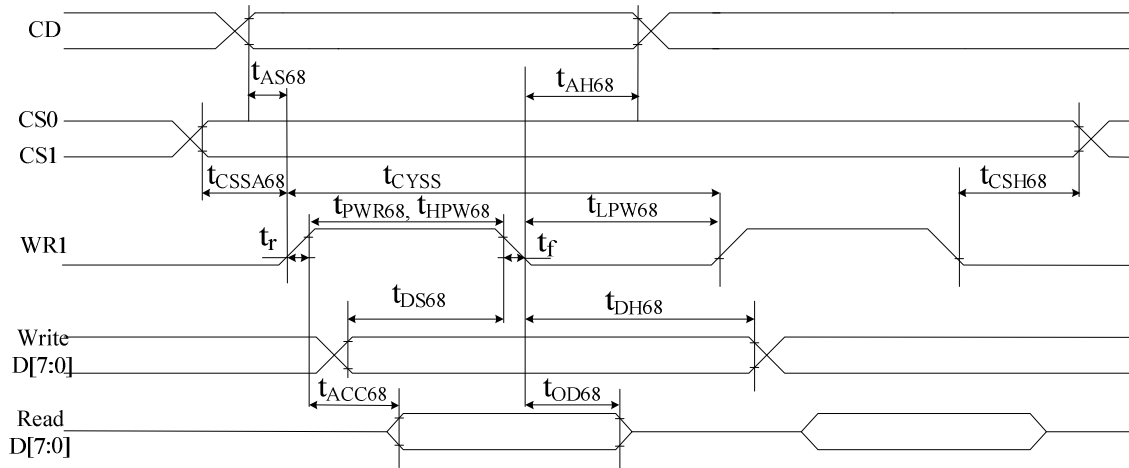


FIGURE 13: Parallel Bus Timing Characteristics (for 6800 MCU)

Symbol	Signal	Description	Condition	Min.	Max.	Unit
(2.5V ≤ V _{DD} < 3.3V, Ta = −30 to +85 °C) (Read / Write)						
t _{AS68} t _{AH68}	CD	Address setup time Address hold time		0 0	–	nS
t _{CSSA68} t _{CSH68}	CS1/CS0	Chip select setup time Chip select hold time		5 5	–	nS
t _{CY68}	WR1	System cycle time		150 / 110	–	nS
t _{PWR68} , t _{PWW68}		Pulse width		60 / 40		
t _{LPW68}		Low pulse width		60 / 40		
t _{DS68} t _{DH68}	D7~D0 (Write)	Data setup time Data hold time		--- / 30 --- / 0	–	nS
t _{ACC68} t _{OD68}	D7~D0 (Read)	Read access time Output disable time	C _L = 100pF	– / --- 50 / ---	60 –	nS
(1.65V ≤ V _{DD} < 2.5V, Ta = −30 to +85 °C) (Read / Write)						
t _{AS68} t _{AH68}	CD	Address setup time Address hold time		0 0	–	nS
t _{CSSA68} t _{CSH68}	CS1/CS0	Chip select setup time Chip select hold time		5 5		nS
t _{CY68}	WR1	cycle time		270 / 190	–	nS
t _{PWR68} , t _{PWW68}		Pulse width		120 / 80		
t _{LPW68}		Low pulse width		120 / 80		
t _{DS68} t _{DH68}	D7~D0 (Write)	Data setup time Data hold time		--- / 60 --- / 0	–	nS
t _{ACC68} t _{OD68}	D7~D0 (Read)	Read access time Output disable time	C _L = 100pF	– / --- 100 / ---	100 –	nS

Note: tr (rising time), tf (falling time) : ≤ 15nS

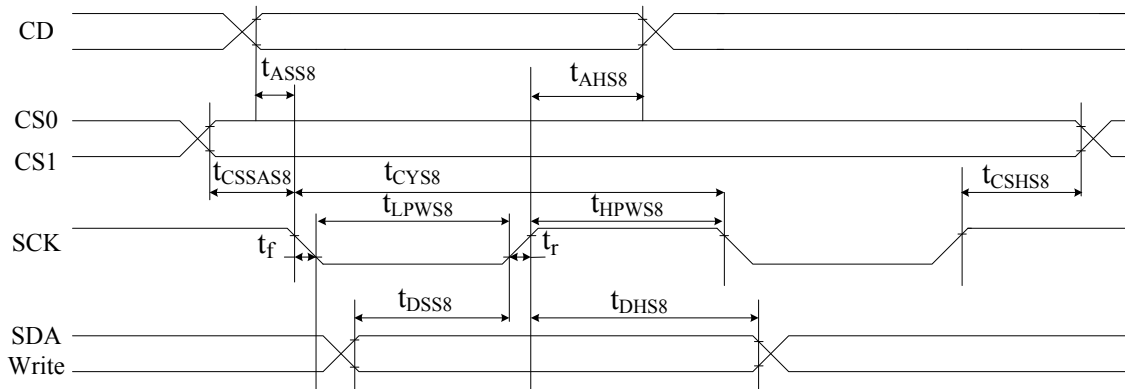


FIGURE 14: Serial Bus Timing Characteristics (for S8)

Symbol	Signal	Description	Condition	Min.	Max.	Unit
(2.5V ≤ V _{DD} < 3.3V, Ta = –30 to +85 °C)						
t _{ASS8} t _{AHS8}	CD	Address setup time Address hold time		0 0	–	nS
t _{CSSAS8} t _{CSHS8}	CS1/CS0	Chip select setup time Chip select hold time		5 5	–	nS
t _{CYS8} t _{LPWS8} t _{HPWS8}	SCK	Cycle time Low pulse width High pulse width		60 15 15	–	nS
t _{DSS8} t _{DHS8}	SDA (Write)	Data setup time Data hold time		12 0	–	nS
(1.65V ≤ V _{DD} < 2.5V, Ta = –30 to +85 °C)						
t _{ASS8} t _{AHS8}	CD	Address setup time Address hold time		0 0	–	nS
t _{CSSAS8} t _{CSHS8}	CS1/CS0	Chip select setup time Chip select hold time		10 10	–	nS
t _{CYS8} t _{LPWS8} t _{HPWS8}	SCK	Cycle time Low pulse width High pulse width		90 30 30	–	nS
t _{DSS8} t _{DHS8}	SDA (Write)	Data setup time Data hold time		24 0	–	nS

Note: tr (rising time), tf (falling time) : ≤ 15nS

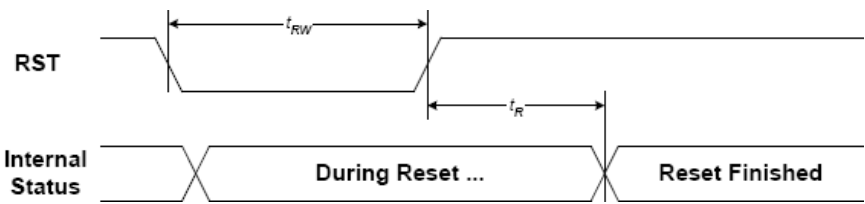


FIGURE 15: Reset Characteristics

($1.65V \leq V_{DD} < 3.3V$, $T_a = -30$ to $+85^{\circ}C$)


Symbol	Signal	Description	Condition	Min.	Max.	Unit
t_{RW}	RST	Reset low pulse width		3	–	μS
t_R	RST, Internal Status	Reset to Internal Status pulse delay		6	–	mS

Note: For each mode, the signal's rising time (t_r) and falling time (t_f) are stipulated to be equal to or less than 15nS each.



PHYSICAL DIMENSIONS

Bump View

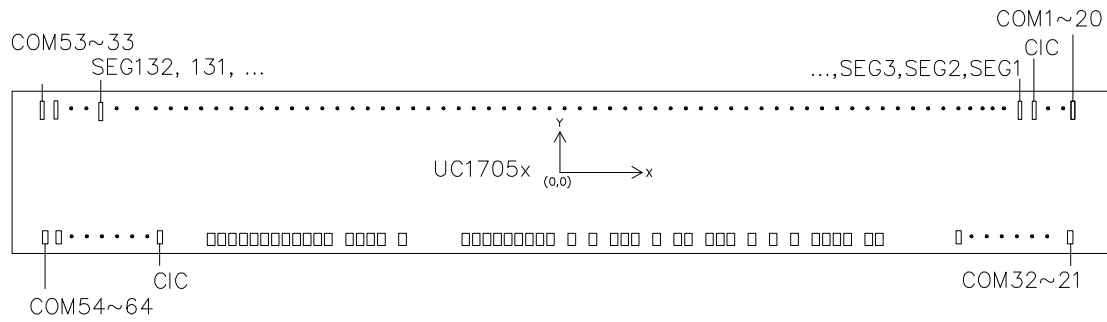


For (Part Number) UC1705xGAA:


For (Part Number) UC1705xGBA:

Die Size:	4850μM x 660μM ± 40μM	Die Size:	4850μM x 660μM ± 40μM
Die Thickness:	400μM ± 20μM	Die Thickness:	400μM ± 20μM
Bump Height:	15μM ± 3μM	Bump Height:	8μM ± 2μM
	(H _{MAX} - H _{MIN}) within die ≤ 2μM		(H _{MAX} - H _{MIN}) within die ≤ 2μM
Bump Size:	15μM x 138.5μM ± 2.5μM (Typ.)	Bump Size:	15μM x 100μM ± 2.5μM (Typ.)
Bump Pitch:	27 μM	Bump Pitch:	27 μM
Bump Gap:	12 μM	Bump Gap:	12 μM
Coordinate origin:	Chip center	Coordinate origin:	Chip center
Pad reference:	Pad center	Pad reference:	Pad center

ALIGNMENT MARK INFORMATION

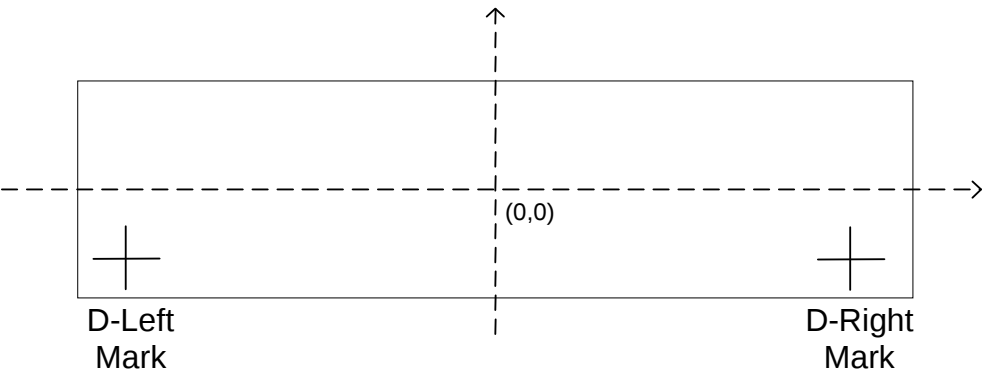

SHAPE OF THE ALIGNMENT MARK:




NOTE:
Alignment mark is on Metal3 under Passivation.
The “+” mark is symmetric both horizontally and vertically.

COORDINATES:

	D-Left Mark (+)		D-Right Mark (+)	
	X	Y	X	Y
1	-1984.5	-149.5	1969.5	-149.5
2	-1969.5	-184.5	1984.5	-184.5
3	-1994.5	-159.5	1959.5	-159.5
4	-1959.5	-174.5	1994.5	-174.5
C	-1977	-167	1977	-167

TOP METAL AND PASSIVATION:

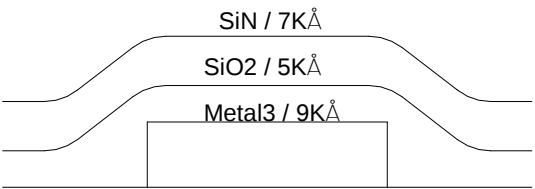

FOR PROCESS CROSS-SECTION

PAD COORDINATES

For (Part Number) UC1705xGAA :

#	Pad	X	Y	W	H
1	COM54	-2363	-227.75	15	138.5
2	COM55	-2336	-227.75	15	138.5
3	COM56	-2309	-227.75	15	138.5
4	COM57	-2282	-227.75	15	138.5
5	COM58	-2255	-227.75	15	138.5
6	COM59	-2228	-227.75	15	138.5
7	COM60	-2201	-227.75	15	138.5
8	COM61	-2174	-227.75	15	138.5
9	COM62	-2147	-227.75	15	138.5
10	COM63	-2120	-227.75	15	138.5
11	COM64	-2093	-227.75	15	138.5
12	CIC	-2066	-227.75	15	138.5
13	TST4	-1970	-274.5	50	45
14	CS0	-1905	-274.5	50	45
15	RST	-1840	-274.5	50	45
16	CD	-1775	-274.5	50	45
17	WR0	-1710	-274.5	50	45
18	WR1	-1645	-274.5	50	45
19	VDDX	-1580	-274.5	50	45
20	D0	-1515	-274.5	50	45
21	D1	-1450	-274.5	50	45
22	D2	-1385	-274.5	50	45
23	D3	-1320	-274.5	50	45
24	D4	-1255	-274.5	50	45
25	D5	-1190	-274.5	50	45
26	D6	-1125	-274.5	50	45
27	D7	-1060	-274.5	50	45
28	VDD	-995	-274.5	50	45
29	VDD	-930	-274.5	50	45
30	VDD2	-865	-274.5	50	45
31	VDD2	-800	-274.5	50	45
32	VDD2	-735	-274.5	50	45
33	VDD3	-670	-274.5	50	45
34	VSS	-605	-274.5	50	45
35	VSS	-540	-274.5	50	45
36	VSS2	-475	-274.5	50	45
37	VSS2	-410	-274.5	50	45
38	VSS2	-345	-274.5	50	45
39	VSS2	-280	-274.5	50	45
40	VB1+	-215	-274.5	50	45
41	VB1+	-150	-274.5	50	45
42	DUMMY	-85	-274.5	50	45
43	VB0+	-20	-274.5	50	45
44	VB0+	45	-274.5	50	45
45	VB0-	110	-274.5	50	45
46	VB0-	175	-274.5	50	45
47	DUMMY	240	-274.5	50	45
48	VB1-	305	-274.5	50	45
49	VB1-	370	-274.5	50	45

#	Pad	X	Y	W	H
50	VB1+	435	-274.5	50	45
51	VB1+	500	-274.5	50	45
52	VLCDIN	565	-274.5	50	45
53	VLCDIN	630	-274.5	50	45
54	VLCDOUT	695	-274.5	50	45
55	VLCDOUT	760	-274.5	50	45
56	DUMMY	820	-274.5	45	45
57	DUMMY	875	-274.5	45	45
58	DUMMY	930	-274.5	45	45
59	DUMMY	985	-274.5	45	45
60	DUMMY	1040	-274.5	45	45
61	DUMMY	1095	-274.5	45	45
62	DUMMY	1150	-274.5	45	45
63	DUMMY	1205	-274.5	45	45
64	DUMMY	1260	-274.5	45	45
65	TST2	1320	-274.5	50	45
66	VSSX	1385	-274.5	50	45
67	VDDX	1450	-274.5	50	45
68	BM0	1515	-274.5	50	45
69	BM1	1580	-274.5	50	45
70	DT1	1645	-274.5	50	45
71	VSSX	1710	-274.5	50	45
72	DT2	1775	-274.5	50	45
73	VDD	1840	-274.5	50	45
74	VDD2	1905	-274.5	50	45
75	VDD3	1970	-274.5	50	45
76	COM32	2066	-227.75	15	138.5
77	COM31	2093	-227.75	15	138.5
78	COM30	2120	-227.75	15	138.5
79	COM29	2147	-227.75	15	138.5
80	COM28	2174	-227.75	15	138.5
81	COM27	2201	-227.75	15	138.5
82	COM26	2228	-227.75	15	138.5
83	COM25	2255	-227.75	15	138.5
84	COM24	2282	-227.75	15	138.5
85	COM23	2309	-227.75	15	138.5
86	COM22	2336	-227.75	15	138.5
87	COM21	2363	-227.75	15	138.5
88	COM20	2363	227.75	15	138.5
89	COM19	2336	227.75	15	138.5
90	COM18	2309	227.75	15	138.5
91	COM17	2282	227.75	15	138.5
92	COM16	2255	227.75	15	138.5
93	COM15	2228	227.75	15	138.5
94	COM14	2201	227.75	15	138.5
95	COM13	2174	227.75	15	138.5
96	COM12	2147	227.75	15	138.5
97	COM11	2120	227.75	15	138.5
98	COM10	2093	227.75	15	138.5
99	COM9	2066	227.75	15	138.5

#	Pad	X	Y	W	H
100	COM8	2039	227.75	15	138.5
101	COM7	2012	227.75	15	138.5
102	COM6	1985	227.75	15	138.5
103	COM5	1958	227.75	15	138.5
104	COM4	1931	227.75	15	138.5
105	COM3	1904	227.75	15	138.5
106	COM2	1877	227.75	15	138.5
107	COM1	1850	227.75	15	138.5
108	CIC	1823	227.75	15	138.5
109	SEG1	1768.5	227.75	15	138.5
110	SEG2	1741.5	227.75	15	138.5
111	SEG3	1714.5	227.75	15	138.5
112	SEG4	1687.5	227.75	15	138.5
113	SEG5	1660.5	227.75	15	138.5
114	SEG6	1633.5	227.75	15	138.5
115	SEG7	1606.5	227.75	15	138.5
116	SEG8	1579.5	227.75	15	138.5
117	SEG9	1552.5	227.75	15	138.5
118	SEG10	1525.5	227.75	15	138.5
119	SEG11	1498.5	227.75	15	138.5
120	SEG12	1471.5	227.75	15	138.5
121	SEG13	1444.5	227.75	15	138.5
122	SEG14	1417.5	227.75	15	138.5
123	SEG15	1390.5	227.75	15	138.5
124	SEG16	1363.5	227.75	15	138.5
125	SEG17	1336.5	227.75	15	138.5
126	SEG18	1309.5	227.75	15	138.5
127	SEG19	1282.5	227.75	15	138.5
128	SEG20	1255.5	227.75	15	138.5
129	SEG21	1228.5	227.75	15	138.5
130	SEG22	1201.5	227.75	15	138.5
131	SEG23	1174.5	227.75	15	138.5
132	SEG24	1147.5	227.75	15	138.5
133	SEG25	1120.5	227.75	15	138.5
134	SEG26	1093.5	227.75	15	138.5
135	SEG27	1066.5	227.75	15	138.5
136	SEG28	1039.5	227.75	15	138.5
137	SEG29	1012.5	227.75	15	138.5
138	SEG30	985.5	227.75	15	138.5
139	SEG31	958.5	227.75	15	138.5
140	SEG32	931.5	227.75	15	138.5
141	SEG33	904.5	227.75	15	138.5
142	SEG34	877.5	227.75	15	138.5
143	SEG35	850.5	227.75	15	138.5
144	SEG36	823.5	227.75	15	138.5
145	SEG37	796.5	227.75	15	138.5
146	SEG38	769.5	227.75	15	138.5
147	SEG39	742.5	227.75	15	138.5
148	SEG40	715.5	227.75	15	138.5
149	SEG41	688.5	227.75	15	138.5
150	SEG42	661.5	227.75	15	138.5
151	SEG43	634.5	227.75	15	138.5

#	Pad	X	Y	W	H
152	SEG44	607.5	227.75	15	138.5
153	SEG45	580.5	227.75	15	138.5
154	SEG46	553.5	227.75	15	138.5
155	SEG47	526.5	227.75	15	138.5
156	SEG48	499.5	227.75	15	138.5
157	SEG49	472.5	227.75	15	138.5
158	SEG50	445.5	227.75	15	138.5
159	SEG51	418.5	227.75	15	138.5
160	SEG52	391.5	227.75	15	138.5
161	SEG53	364.5	227.75	15	138.5
162	SEG54	337.5	227.75	15	138.5
163	SEG55	310.5	227.75	15	138.5
164	SEG56	283.5	227.75	15	138.5
165	SEG57	256.5	227.75	15	138.5
166	SEG58	229.5	227.75	15	138.5
167	SEG59	202.5	227.75	15	138.5
168	SEG60	175.5	227.75	15	138.5
169	SEG61	148.5	227.75	15	138.5
170	SEG62	121.5	227.75	15	138.5
171	SEG63	94.5	227.75	15	138.5
172	SEG64	67.5	227.75	15	138.5
173	SEG65	40.5	227.75	15	138.5
174	SEG66	13.5	227.75	15	138.5
175	SEG67	-13.5	227.75	15	138.5
176	SEG68	-40.5	227.75	15	138.5
177	SEG69	-67.5	227.75	15	138.5
178	SEG70	-94.5	227.75	15	138.5
179	SEG71	-121.5	227.75	15	138.5
180	SEG72	-148.5	227.75	15	138.5
181	SEG73	-175.5	227.75	15	138.5
182	SEG74	-202.5	227.75	15	138.5
183	SEG75	-229.5	227.75	15	138.5
184	SEG76	-256.5	227.75	15	138.5
185	SEG77	-283.5	227.75	15	138.5
186	SEG78	-310.5	227.75	15	138.5
187	SEG79	-337.5	227.75	15	138.5
188	SEG80	-364.5	227.75	15	138.5
189	SEG81	-391.5	227.75	15	138.5
190	SEG82	-418.5	227.75	15	138.5
191	SEG83	-445.5	227.75	15	138.5
192	SEG84	-472.5	227.75	15	138.5
193	SEG85	-499.5	227.75	15	138.5
194	SEG86	-526.5	227.75	15	138.5
195	SEG87	-553.5	227.75	15	138.5
196	SEG88	-580.5	227.75	15	138.5
197	SEG89	-607.5	227.75	15	138.5
198	SEG90	-634.5	227.75	15	138.5
199	SEG91	-661.5	227.75	15	138.5
200	SEG92	-688.5	227.75	15	138.5
201	SEG93	-715.5	227.75	15	138.5
202	SEG94	-742.5	227.75	15	138.5
203	SEG95	-769.5	227.75	15	138.5

#	Pad	X	Y	W	H
204	SEG96	-796.5	227.75	15	138.5
205	SEG97	-823.5	227.75	15	138.5
206	SEG98	-850.5	227.75	15	138.5
207	SEG99	-877.5	227.75	15	138.5
208	SEG100	-904.5	227.75	15	138.5
209	SEG101	-931.5	227.75	15	138.5
210	SEG102	-958.5	227.75	15	138.5
211	SEG103	-985.5	227.75	15	138.5
212	SEG104	-1012.5	227.75	15	138.5
213	SEG105	-1039.5	227.75	15	138.5
214	SEG106	-1066.5	227.75	15	138.5
215	SEG107	-1093.5	227.75	15	138.5
216	SEG108	-1120.5	227.75	15	138.5
217	SEG109	-1147.5	227.75	15	138.5
218	SEG110	-1174.5	227.75	15	138.5
219	SEG111	-1201.5	227.75	15	138.5
220	SEG112	-1228.5	227.75	15	138.5
221	SEG113	-1255.5	227.75	15	138.5
222	SEG114	-1282.5	227.75	15	138.5
223	SEG115	-1309.5	227.75	15	138.5
224	SEG116	-1336.5	227.75	15	138.5
225	SEG117	-1363.5	227.75	15	138.5
226	SEG118	-1390.5	227.75	15	138.5
227	SEG119	-1417.5	227.75	15	138.5
228	SEG120	-1444.5	227.75	15	138.5
229	SEG121	-1471.5	227.75	15	138.5
230	SEG122	-1498.5	227.75	15	138.5
231	SEG123	-1525.5	227.75	15	138.5
232	SEG124	-1552.5	227.75	15	138.5
233	SEG125	-1579.5	227.75	15	138.5
234	SEG126	-1606.5	227.75	15	138.5
235	SEG127	-1633.5	227.75	15	138.5
236	SEG128	-1660.5	227.75	15	138.5
237	SEG129	-1687.5	227.75	15	138.5
238	SEG130	-1714.5	227.75	15	138.5
239	SEG131	-1741.5	227.75	15	138.5
240	SEG132	-1768.5	227.75	15	138.5
241	COM33	-1823	227.75	15	138.5
242	COM34	-1850	227.75	15	138.5
243	COM35	-1877	227.75	15	138.5
244	COM36	-1904	227.75	15	138.5
245	COM37	-1931	227.75	15	138.5
246	COM38	-1958	227.75	15	138.5
247	COM39	-1985	227.75	15	138.5
248	COM40	-2012	227.75	15	138.5
249	COM41	-2039	227.75	15	138.5
250	COM42	-2066	227.75	15	138.5
251	COM43	-2093	227.75	15	138.5
252	COM44	-2120	227.75	15	138.5
253	COM45	-2147	227.75	15	138.5
254	COM46	-2174	227.75	15	138.5
255	COM47	-2201	227.75	15	138.5

#	Pad	X	Y	W	H
256	COM48	-2228	227.75	15	138.5
257	COM49	-2255	227.75	15	138.5
258	COM50	-2282	227.75	15	138.5
259	COM51	-2309	227.75	15	138.5
260	COM52	-2336	227.75	15	138.5
261	COM53	-2363	227.75	15	138.5

For (Part Number) UC1705xGBA:

#	Pad	X	Y	W	H
1	COM54	-2363	-247	15	100
2	COM55	-2336	-247	15	100
3	COM56	-2309	-247	15	100
4	COM57	-2282	-247	15	100
5	COM58	-2255	-247	15	100
6	COM59	-2228	-247	15	100
7	COM60	-2201	-247	15	100
8	COM61	-2174	-247	15	100
9	COM62	-2147	-247	15	100
10	COM63	-2120	-247	15	100
11	COM64	-2093	-247	15	100
12	CIC	-2066	-247	15	100
13	TST4	-1970	-274.5	50	45
14	CS0	-1905	-274.5	50	45
15	RST	-1840	-274.5	50	45
16	CD	-1775	-274.5	50	45
17	WR0	-1710	-274.5	50	45
18	WR1	-1645	-274.5	50	45
19	VDDX	-1580	-274.5	50	45
20	D0	-1515	-274.5	50	45
21	D1	-1450	-274.5	50	45
22	D2	-1385	-274.5	50	45
23	D3	-1320	-274.5	50	45
24	D4	-1255	-274.5	50	45
25	D5	-1190	-274.5	50	45
26	D6	-1125	-274.5	50	45
27	D7	-1060	-274.5	50	45
28	VDD	-995	-274.5	50	45
29	VDD	-930	-274.5	50	45
30	VDD2	-865	-274.5	50	45
31	VDD2	-800	-274.5	50	45
32	VDD2	-735	-274.5	50	45
33	VDD3	-670	-274.5	50	45
34	VSS	-605	-274.5	50	45
35	VSS	-540	-274.5	50	45
36	VSS2	-475	-274.5	50	45
37	VSS2	-410	-274.5	50	45
38	VSS2	-345	-274.5	50	45
39	VSS2	-280	-274.5	50	45
40	VB1+	-215	-274.5	50	45
41	VB1+	-150	-274.5	50	45
42	DUMMY	-85	-274.5	50	45
43	VB0+	-20	-274.5	50	45
44	VB0+	45	-274.5	50	45
45	VB0-	110	-274.5	50	45
46	VB0-	175	-274.5	50	45
47	DUMMY	240	-274.5	50	45
48	VB1-	305	-274.5	50	45
49	VB1-	370	-274.5	50	45
50	VB1+	435	-274.5	50	45
51	VB1+	500	-274.5	50	45
52	VLCDIN	565	-274.5	50	45
53	VLCDIN	630	-274.5	50	45
54	VLCDOUT	695	-274.5	50	45
55	VLCDOUT	760	-274.5	50	45
56	DUMMY	820	-274.5	45	45
57	DUMMY	875	-274.5	45	45
58	DUMMY	930	-274.5	45	45
59	DUMMY	985	-274.5	45	45


#	Pad	X	Y	W	H
60	DUMMY	1040	-274.5	45	45
61	DUMMY	1095	-274.5	45	45
62	DUMMY	1150	-274.5	45	45
63	DUMMY	1205	-274.5	45	45
64	DUMMY	1260	-274.5	45	45
65	TST2	1320	-274.5	50	45
66	VSSX	1385	-274.5	50	45
67	VDDX	1450	-274.5	50	45
68	BM0	1515	-274.5	50	45
69	BM1	1580	-274.5	50	45
70	DT1	1645	-274.5	50	45
71	VSSX	1710	-274.5	50	45
72	DT2	1775	-274.5	50	45
73	VDD	1840	-274.5	50	45
74	VDD2	1905	-274.5	50	45
75	VDD3	1970	-274.5	50	45
76	COM32	2066	-247	15	100
77	COM31	2093	-247	15	100
78	COM30	2120	-247	15	100
79	COM29	2147	-247	15	100
80	COM28	2174	-247	15	100
81	COM27	2201	-247	15	100
82	COM26	2228	-247	15	100
83	COM25	2255	-247	15	100
84	COM24	2282	-247	15	100
85	COM23	2309	-247	15	100
86	COM22	2336	-247	15	100
87	COM21	2363	-247	15	100
88	COM20	2363	247	15	100
89	COM19	2336	247	15	100
90	COM18	2309	247	15	100
91	COM17	2282	247	15	100
92	COM16	2255	247	15	100
93	COM15	2228	247	15	100
94	COM14	2201	247	15	100
95	COM13	2174	247	15	100
96	COM12	2147	247	15	100
97	COM11	2120	247	15	100
98	COM10	2093	247	15	100
99	COM9	2066	247	15	100
100	COM8	2039	247	15	100
101	COM7	2012	247	15	100
102	COM6	1985	247	15	100
103	COM5	1958	247	15	100
104	COM4	1931	247	15	100
105	COM3	1904	247	15	100
106	COM2	1877	247	15	100
107	COM1	1850	247	15	100
108	CIC	1823	247	15	100
109	SEG1	1768.5	247	15	100
110	SEG2	1741.5	247	15	100
111	SEG3	1714.5	247	15	100
112	SEG4	1687.5	247	15	100
113	SEG5	1660.5	247	15	100
114	SEG6	1633.5	247	15	100
115	SEG7	1606.5	247	15	100
116	SEG8	1579.5	247	15	100
117	SEG9	1552.5	247	15	100
118	SEG10	1525.5	247	15	100

#	Pad	X	Y	W	H
119	SEG11	1498.5	247	15	100
120	SEG12	1471.5	247	15	100
121	SEG13	1444.5	247	15	100
122	SEG14	1417.5	247	15	100
123	SEG15	1390.5	247	15	100
124	SEG16	1363.5	247	15	100
125	SEG17	1336.5	247	15	100
126	SEG18	1309.5	247	15	100
127	SEG19	1282.5	247	15	100
128	SEG20	1255.5	247	15	100
129	SEG21	1228.5	247	15	100
130	SEG22	1201.5	247	15	100
131	SEG23	1174.5	247	15	100
132	SEG24	1147.5	247	15	100
133	SEG25	1120.5	247	15	100
134	SEG26	1093.5	247	15	100
135	SEG27	1066.5	247	15	100
136	SEG28	1039.5	247	15	100
137	SEG29	1012.5	247	15	100
138	SEG30	985.5	247	15	100
139	SEG31	958.5	247	15	100
140	SEG32	931.5	247	15	100
141	SEG33	904.5	247	15	100
142	SEG34	877.5	247	15	100
143	SEG35	850.5	247	15	100
144	SEG36	823.5	247	15	100
145	SEG37	796.5	247	15	100
146	SEG38	769.5	247	15	100
147	SEG39	742.5	247	15	100
148	SEG40	715.5	247	15	100
149	SEG41	688.5	247	15	100
150	SEG42	661.5	247	15	100
151	SEG43	634.5	247	15	100
152	SEG44	607.5	247	15	100
153	SEG45	580.5	247	15	100
154	SEG46	553.5	247	15	100
155	SEG47	526.5	247	15	100
156	SEG48	499.5	247	15	100
157	SEG49	472.5	247	15	100
158	SEG50	445.5	247	15	100
159	SEG51	418.5	247	15	100
160	SEG52	391.5	247	15	100
161	SEG53	364.5	247	15	100
162	SEG54	337.5	247	15	100
163	SEG55	310.5	247	15	100
164	SEG56	283.5	247	15	100
165	SEG57	256.5	247	15	100
166	SEG58	229.5	247	15	100
167	SEG59	202.5	247	15	100
168	SEG60	175.5	247	15	100
169	SEG61	148.5	247	15	100
170	SEG62	121.5	247	15	100
171	SEG63	94.5	247	15	100
172	SEG64	67.5	247	15	100
173	SEG65	40.5	247	15	100
174	SEG66	13.5	247	15	100
175	SEG67	-13.5	247	15	100
176	SEG68	-40.5	247	15	100
177	SEG69	-67.5	247	15	100
178	SEG70	-94.5	247	15	100

#	Pad	X	Y	W	H
179	SEG71	-121.5	247	15	100
180	SEG72	-148.5	247	15	100
181	SEG73	-175.5	247	15	100
182	SEG74	-202.5	247	15	100
183	SEG75	-229.5	247	15	100
184	SEG76	-256.5	247	15	100
185	SEG77	-283.5	247	15	100
186	SEG78	-310.5	247	15	100
187	SEG79	-337.5	247	15	100
188	SEG80	-364.5	247	15	100
189	SEG81	-391.5	247	15	100
190	SEG82	-418.5	247	15	100
191	SEG83	-445.5	247	15	100
192	SEG84	-472.5	247	15	100
193	SEG85	-499.5	247	15	100
194	SEG86	-526.5	247	15	100
195	SEG87	-553.5	247	15	100
196	SEG88	-580.5	247	15	100
197	SEG89	-607.5	247	15	100
198	SEG90	-634.5	247	15	100
199	SEG91	-661.5	247	15	100
200	SEG92	-688.5	247	15	100
201	SEG93	-715.5	247	15	100
202	SEG94	-742.5	247	15	100
203	SEG95	-769.5	247	15	100
204	SEG96	-796.5	247	15	100
205	SEG97	-823.5	247	15	100
206	SEG98	-850.5	247	15	100
207	SEG99	-877.5	247	15	100
208	SEG100	-904.5	247	15	100
209	SEG101	-931.5	247	15	100
210	SEG102	-958.5	247	15	100
211	SEG103	-985.5	247	15	100
212	SEG104	-1012.5	247	15	100
213	SEG105	-1039.5	247	15	100
214	SEG106	-1066.5	247	15	100
215	SEG107	-1093.5	247	15	100
216	SEG108	-1120.5	247	15	100
217	SEG109	-1147.5	247	15	100
218	SEG110	-1174.5	247	15	100
219	SEG111	-1201.5	247	15	100
220	SEG112	-1228.5	247	15	100
221	SEG113	-1255.5	247	15	100
222	SEG114	-1282.5	247	15	100
223	SEG115	-1309.5	247	15	100
224	SEG116	-1336.5	247	15	100
225	SEG117	-1363.5	247	15	100
226	SEG118	-1390.5	247	15	100
227	SEG119	-1417.5	247	15	100
228	SEG120	-1444.5	247	15	100
229	SEG121	-1471.5	247	15	100
230	SEG122	-1498.5	247	15	100
231	SEG123	-1525.5	247	15	100
232	SEG124	-1552.5	247	15	100
233	SEG125	-1579.5	247	15	100
234	SEG126	-1606.5	247	15	100
235	SEG127	-1633.5	247	15	100
236	SEG128	-1660.5	247	15	100
237	SEG129	-1687.5	247	15	100
238	SEG130	-1714.5	247	15	100

#	Pad	X	Y	W	H
239	SEG131	-1741.5	247	15	100
240	SEG132	-1768.5	247	15	100
241	COM33	-1823	247	15	100
242	COM34	-1850	247	15	100
243	COM35	-1877	247	15	100
244	COM36	-1904	247	15	100
245	COM37	-1931	247	15	100
246	COM38	-1958	247	15	100
247	COM39	-1985	247	15	100
248	COM40	-2012	247	15	100
249	COM41	-2039	247	15	100
250	COM42	-2066	247	15	100
251	COM43	-2093	247	15	100
252	COM44	-2120	247	15	100
253	COM45	-2147	247	15	100
254	COM46	-2174	247	15	100
255	COM47	-2201	247	15	100
256	COM48	-2228	247	15	100
257	COM49	-2255	247	15	100
258	COM50	-2282	247	15	100
259	COM51	-2309	247	15	100
260	COM52	-2336	247	15	100
261	COM53	-2363	247	15	100

TRAY INFORMATION

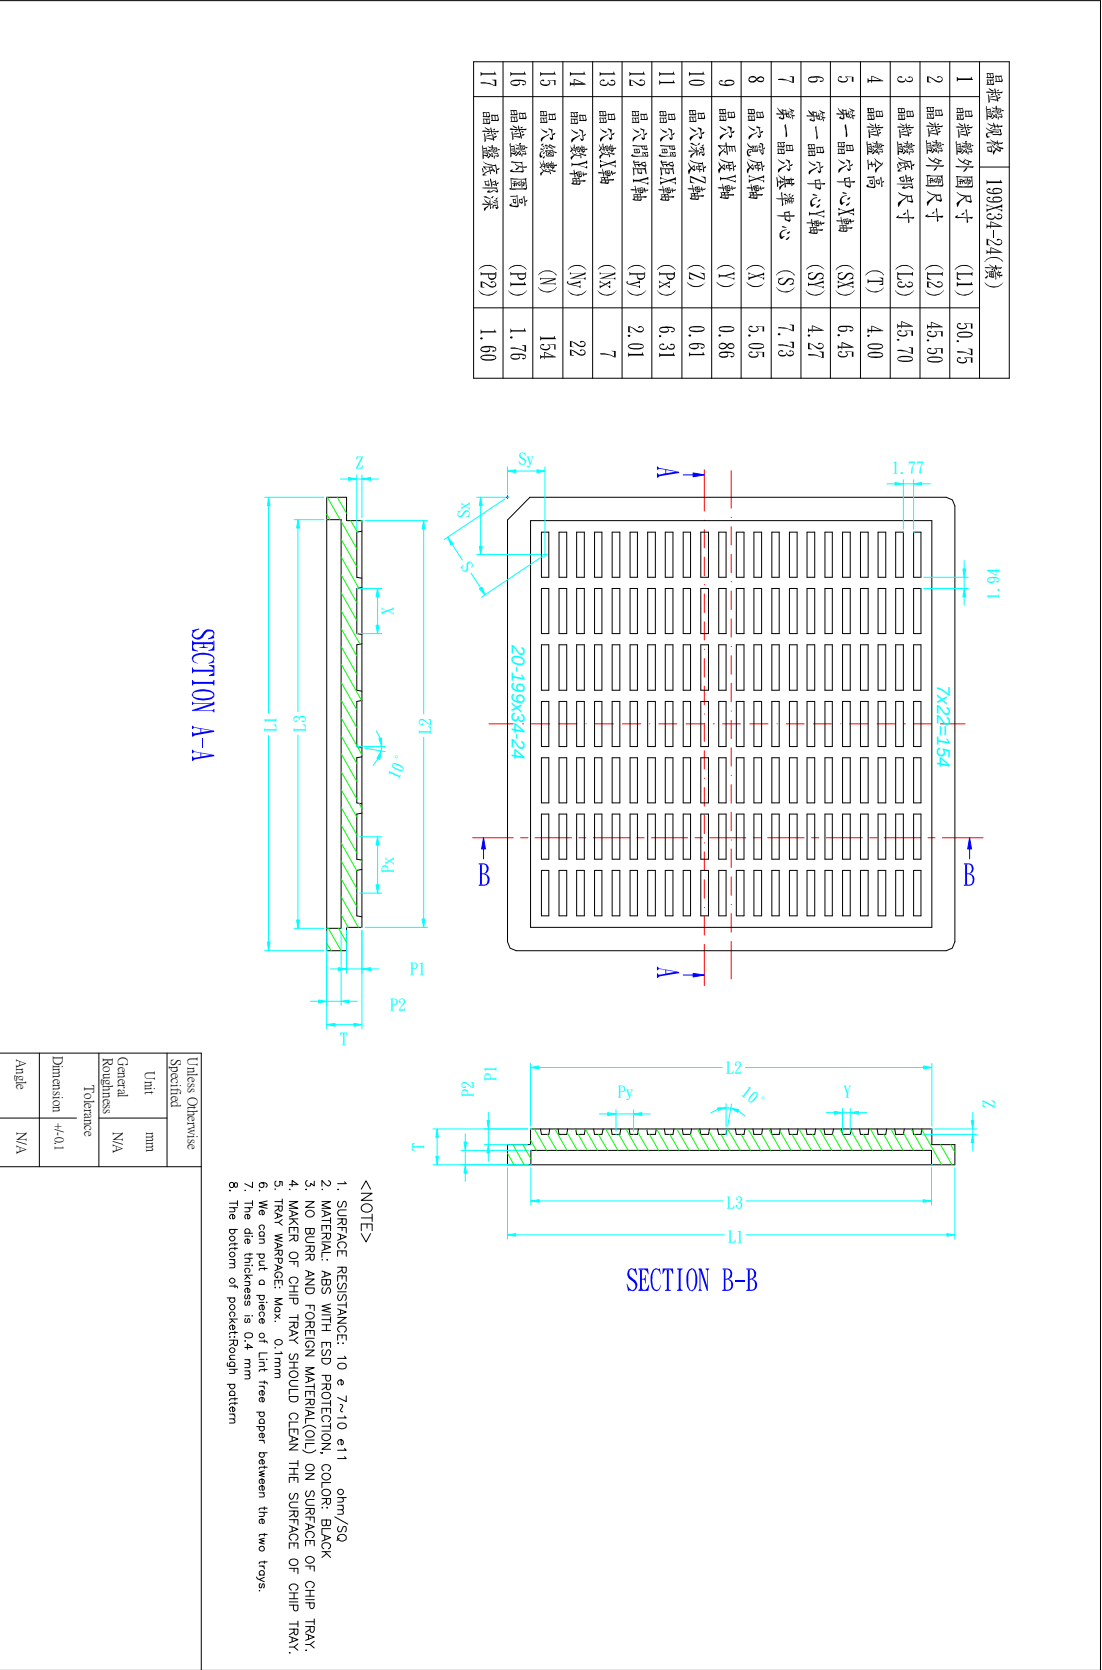

REVISION HISTORY

Revision	Contents	Date
1.0	N/A	Mar. 22, 2010
1.01	(1) Bump Height: 15uM → 12uM	Apr. 13, '10
1.02	(1) Bump Height: 12uM → 15uM	Aug. 3, 2010
1.1	Another set of pad information is provided.	Mar. 27, 2012
1.11	(1) Figure 3, the drawing for Parallel Host Interface, is updated.	Oct. 1, 2012
	(2) Some legacy AC timings are removed.	