

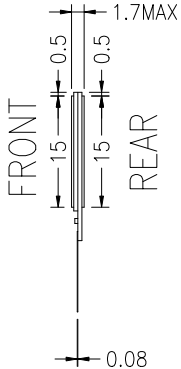


接口定义:

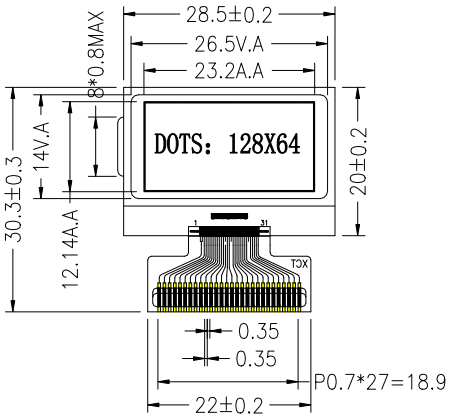

DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANFLECTIVE
 VIEWING DIRECTION: 6:00-CLOCK
 DRIVE METHOD: 1/65DUTY,1/9BIAS
 OPERATING VOLTAGE: 8.3v
 OPERATING TEMP: 0 TO 50 Deg.C
 STORAGE TEMP: -10 TO 60 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ±0.20




PIN	DESC	PIN	DESC
1	VDD	17	D6
2	PSB	18	D5
3	C86	19	D4
4	VGout VGs VGin	20	D3
5	NC	21	D2
6	NC	22	D1
7	NC	23	D0
8	NC	24	RED
9	VMO	25	RWR
10	XV0in	26	A0
11	XV0s XV0out	27	RSTB
12	V0out V0s	28	CSB
13	V0in		
14	NC		
15	VSS		
16	D7		

媒体编号

旧底图总号	3		
	2		
	1		
底图总号	序号	更改内容	日期
	设计		
	制图		
	审核		

XCT6708-28PIN

PD 图



标记 比例

1:1

第 1 张 共 1 张 设计日期 2008.8.01

深圳市日月鑫显示技术有限公司