



### 接口定义

PIN	DESC
1	VLCD
2	VB1+
3	VB1-
4	VB0-
5	VB0+
6	VSS
7	VDD
8	D7
9	D6
10	CD
11	RST
12	CS0

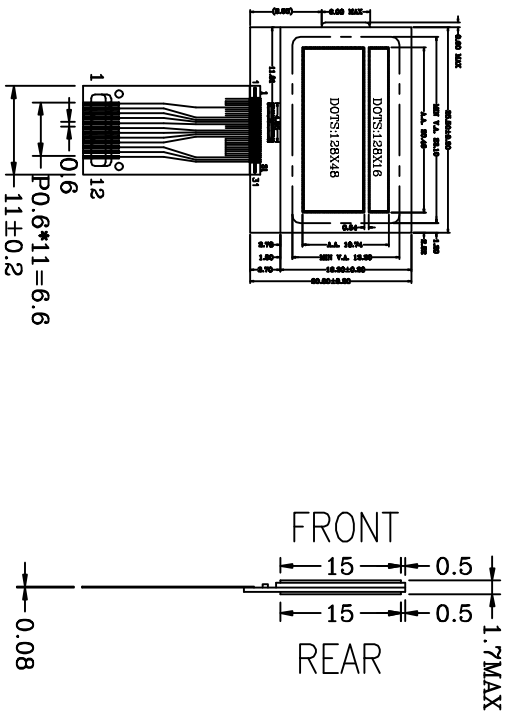

由 Autodesk 教育版产品制作

DISPLAY TYPE: FSTN/POSITIVE  
 POLARIZER: TRANSPARENT  
 VIEWING DIRECTION: 6:00-CLOCK  
 DRIVE METHOD: 1/65DUTY,1/9BIAS  
 OPERATING VOLTAGE: 8.3V  
 OPERATING TEMP: 0 TO 50 Deg.C  
 STORAGE TEMP: -10 TO 60 Deg.C  
 CONNECTOR: COG  
 UNSIGNED TOLERANCE: ±0.20

由 Autodesk 教育版产品制作

SHEET: 1 OF 2		HOTWELLG 深圳市好威格电子有限公司	
GENERAL TOL:	UNITS		
±0.20 MM	MM		
CUS NO:		MODULE NUMBER:	
DRAWN BY:	ZXM	1.2	
CHK BY:	LJQIN		
DATE:	2012.05.20		
PROJECTION		DATE: 4-8-2012	
TEL:0755-29647561			
FAX:0755-29642316			