

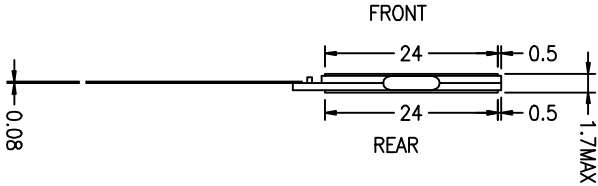


接口定义:

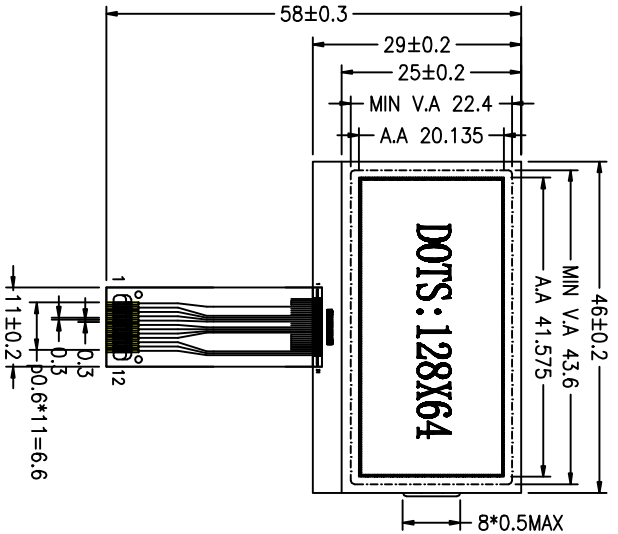

PIN	DESC	
1	VLCD	C=1UF
2	VB1+	
3	VB1-	
4	VB0-	
5	VB0+	
6	VSS	
7	VDD	
8	D7	SDA
9	D6	SCK
10	CD	A0
11	RST	
12	CS0	

由 Autodesk 教育版产品制作

DISPLAY TYPE: FSTN/POSITIVE
POLARIZER: TRANSMFLECTIVE
VIEWING DIRECTION: 6:00-CLOCK
DRIVE METHOD: 1/65DUTY,1/9BIAS
OPERATING VOLTAGE: 8.0V
OPERATING TEMP: -10 TO 60 Deg.C
STORAGE TEMP: -20 TO 70 Deg.C
CONNECTOR: COG

SHEET: 1 OF 2		HOTWELLG 深圳市好威格电子有限公司	
GENERAL TOL:	UNITS	MODULE NUMBER:	
CUS NO:	MM	712-12P-30MM	TEL:0755-29647561
DRAW BY:	ZXM		FAX:0755-29642316
CHK BY:	LIQIN		
APP BY:	TO	DO NOT SCALE THIS DRAWING. PROJECTION	DATE: 4-8-2012