

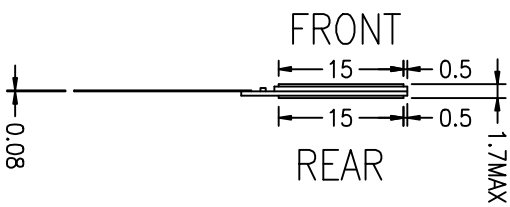


接口定义

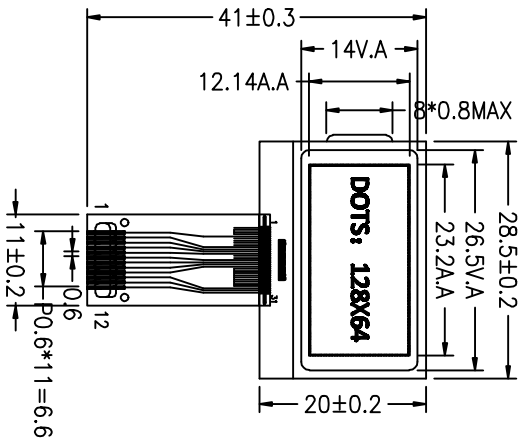

PIN	DESC
1	VLCD
2	VB1+
3	VB1-
4	VB0-
5	VB0+
6	VSS
7	VDD
8	D7
9	D6
10	CD
11	RST
12	CS0

DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANSPARENT
 VIEWING DIRECTION: 6:00-CLOCK
 DRIVE METHOD: 1/65DUTY,1/9BIAS
 OPERATING VOLTAGE: 8.3V
 OPERATING TEMP: 0 TO 50 Deg.C
 STORAGE TEMP: -10 TO 60 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ±0.20

SHEET: 1 OF 2	UNITS	HOTWELLG 深圳市好威格电子有限公司	
GENERAL TOL: ±0.20 MM	MM	MODULE NUMBER:	1.2
CUS NO:		TEL:0755-29647561	
CHK BY: LQJIN	ZXM	FAX:0755-29642316	
PROJ: 70		DATE: 4-8-2012	